



FEMALE END VIEW

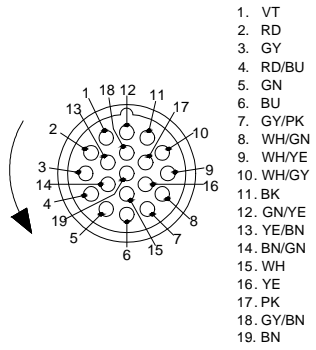

- 1. VT
- 2. RD
- 3. GY
- 4. RD/BU
- 5. GN
- 6. BU
- 7. GY/PK
- 8. WH/GN
- 9. WH/YE
- 10. WH/GY
- 11. BK
- 12. GN/YE
- 13. YE/BN
- 14. BN/BN
- 15. WH
- 16. YE
- 17. PK
- 18. GY/BN
- 19. BN

SPECIFICATIONS

CONTACT CARRIER MATERIAL/COLOR	PBT/WHITE
MOLDED HEAD MATERIAL/COLOR	TPU/BLACK
CONTACT MATERIAL/PLATING	BRASS/SILVER
COUPLING NUT MATERIAL/PLATING	ZINC ALLOY/NICKEL
RATED CURRENT	9A(PINS 6,12,19),2A(ALL OTHERS)
RATED VOLTAGE	150 V
OUTER CABLR JACKET MATERIAL/COLOR	PVC/BLACK
CONDUCTOR INSULATION MATERIAL	PVC
NUMBER OF CONDUCTORS (AWG)	3X18AWG+16X22AWG
OPERATING TEMPERATURE	-40°C — +80°C
PROTECTION CLASS	IEC IP67

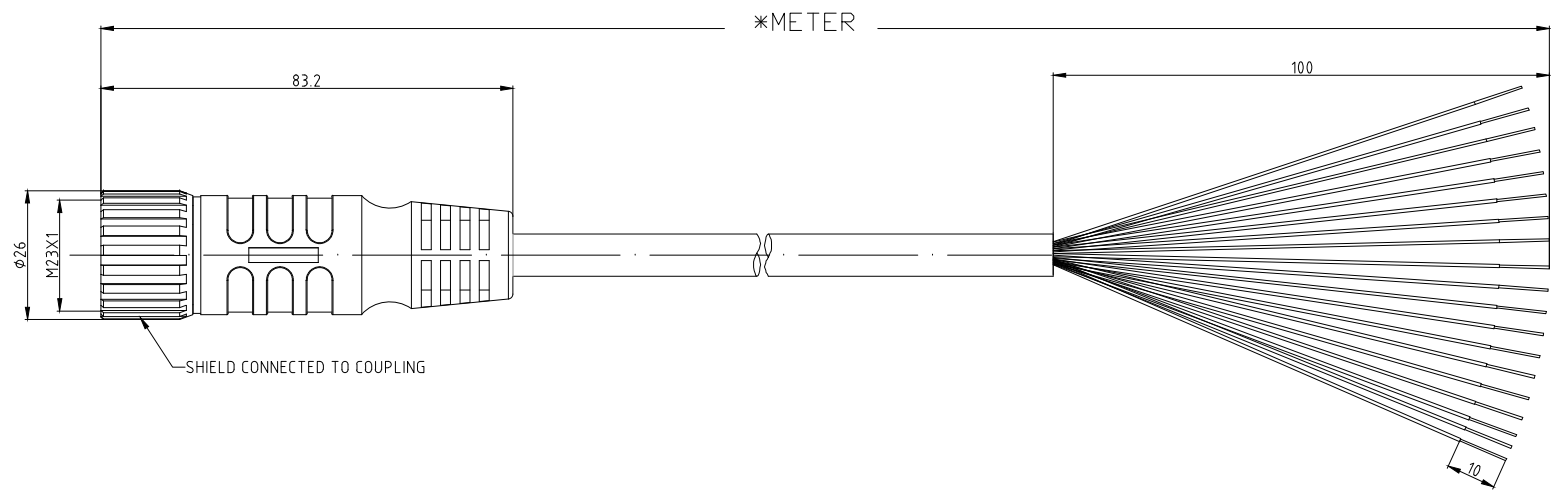

SHIELD CONNECTED TO COUPLING

CABLE LENGTH	TOLERANCE
ALL LENGTHS	+4%(OR 50mm) OF LENGTH -0% (OR 0mm) OF LENGTH WHICHEVER IS GREATER
STRIP LENGTH	TOLERANCE
0 - 7mm	± 1.0mm
8 - 29mm	± 1.5mm
30 - 49mm	± 2.0mm
50 - 69mm	± 3.0mm
70 - 100mm	± 4.0mm
over 100mm	± 5.0mm

REV	COUNT	DESCRIPTION OF REVISIONS	BY	CHECKED	DATE

UNIT OF MEASUREMENT MILLIMETER	<b>GSEE TECH</b>	
<b>Tianjin Geneuo Technology Co.,Ltd</b>		
Approved: Date:	Date: 2019.3.15	Description: GNK19-19-xM/P00
Process: Date:	Scale: 1:1	
Checked: Date:	3RD Angle Projection	www.gsee-tech.cn www.gsee-tech.com
Designed: ZL Date: 2019.3.15		REV A
SOURCE DRAWING-FOR REFERENCE ONLY		