
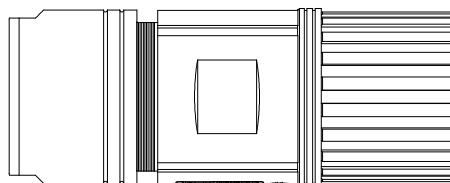
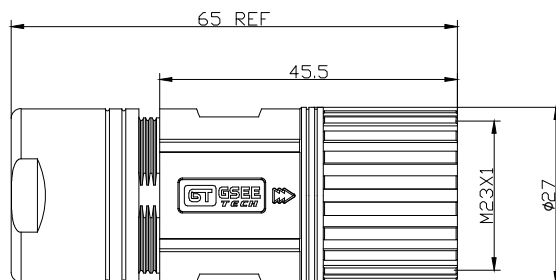
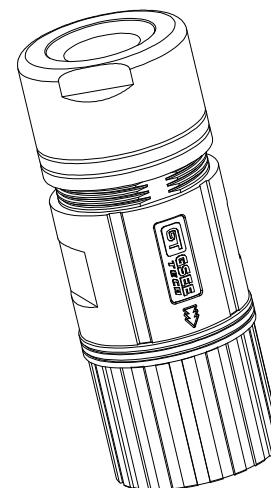


## FEMALE END VIEW

GROUND CONNECTED  
TO HOUSING

## SPECIFICATIONS

CONTACT CARRIER MATERIAL/COLOR	PA6/BLACK
CONTACT MATERIAL/PLATING	BRASS/GOLD
COUPLING NUT MATERIAL/PLATING	ZINC ALLOY/NICKEL
O-SEALING RING MATERIAL	NBR
RATED CURRENT	28A
RATED VOLTAGE	630V
MAX.CONDUCTORS SIZE	12AWG
TERMINATION METHOD	CLIMP
OPERATING TEMPERATURE	-40°C — +85°C
PROTECTION CLASS	IEC IP67
CABLE GRIP RANGE	7-12,11-17mm

UNIT OF MEASUREMENT  
MILLIMETER

Tianjin Geneuo Technology Co.,Ltd

Approved:  
Date:


Date: 2019.5.8

Description:

GNK6228-0/M24/C1

Process:  
Date:

Scale: 1:1

Checked:  
Date:3RD Angle  
Projectionwww.gsee-tech.cn  
www.gsee-tech.comREV  
A

SOURCE DRAWING-FOR REFERENCE ONLY

REV	COUNT	DESCRIPTION OF REVISIONS	BY	CHECKED	DATE