

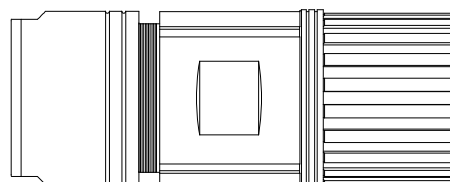
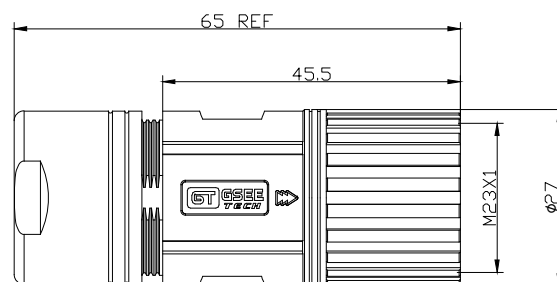



FEMALE END VIEW

GROUND CONNECTED
TO HOUSING

SPECIFICATIONS

CONTACT CARRIER MATERIAL/COLOR	PA6/BLACK
CONTACT MATERIAL/PLATING	BRASS/GOLD
COUPLING NUT MATERIAL/PLATING	ZINC ALLOY/NICKEL
O-SEALING RING MATERIAL	NBR
RATED CURRENT	20A(PINS 1-4);8A(PINS A-D)
RATED VOLTAGE	630V(PINS 1-4);250V(PINS A-D)
MAX.CONDUCTORS SIZE	14AWG(PINS 1-4);18AWG(PINS A-D)
TERMINATION METHOD	CLIMP
OPERATING TEMPERATURE	-40°C — +85°C
PROTECTION CLASS	IEC IP67
CABLE GRIP RANGE	7-12;11-17mm

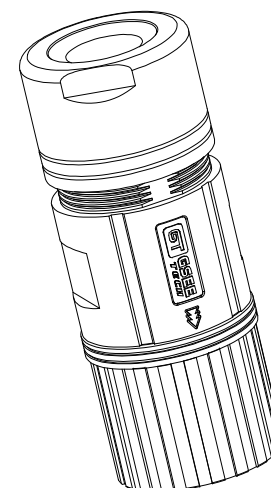

UNIT OF MEASUREMENT MILLIMETER		 Tianjin Geneuo Technology Co.,Ltd			
Approved: Date:	Date: 2019.5.8		Description: GNK8228-0/M24/C		
Process: Date:	Scale: 1:1				
Checked: Date:	3RD Angle Projection		www.gsee-tech.cn www.gsee-tech.com		REV A
Designed: ZL Date: 2019.3.13			SOURCE DRAWING-FOR REFERENCE ONLY		

REV	COUNT	DESCRIPTION OF REVISIONS	BY	CHECKED	DATE