




FEMALE END VIEW

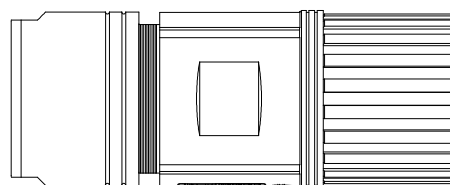



GROUND CONNECTED
TO HOUSING

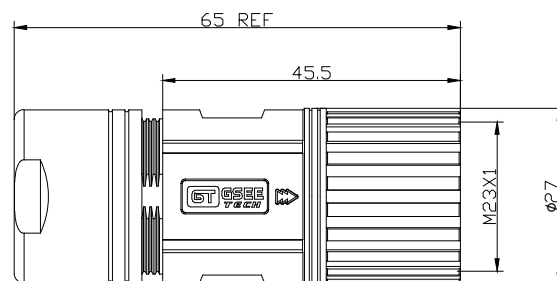

SPECIFICATIONS

CONTACT CARRIER MATERIAL/COLOR	PA6/BLACK
CONTACT MATERIAL/PLATING	BRASS/GOLD
COUPLING NUT MATERIAL/PLATING	ZINC ALLOY/NICKEL
O-SEALING RING MATERIAL	NBR
RATED CURRENT	30A(PINS 1-4);10A(PINS A-D)
RATED VOLTAGE	630V(PINS 1-4);250V(PINS A-D)
MAX.CONDUCTORS SIZE	12AWG(PINS 1-4);16AWG(PINS A-D)
TERMINATION METHOD	CLIMP
OPERATING TEMPERATURE	-40°C — +85°C
PROTECTION CLASS	IEC IP67
CABLE GRIP RANGE	7-12;11-17mm

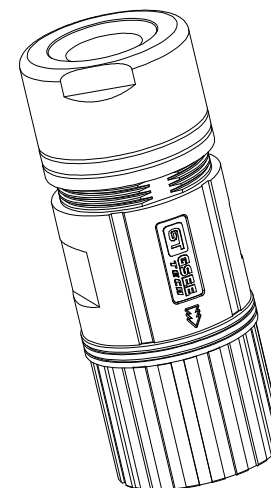

UNIT OF MEASUREMENT		 Tianjin Geneuo Technology Co.,Ltd					
MILLIMETER							
Approved: Date:		Date: 2019.5.8		Description: GNK8228-0/M24/C			
Process: Date:		Scale: 1:1					
Checked: Date:		3RD Angle Projection		www.gsee-tech.cn www.gsee-tech.com		REV A	
Designed: ZL Date: 2019.3.13				SOURCE DRAWING-FOR REFERENCE ONLY			