

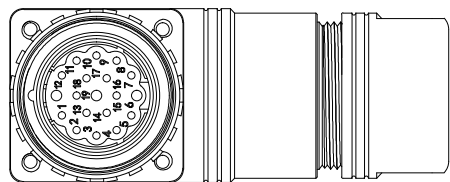
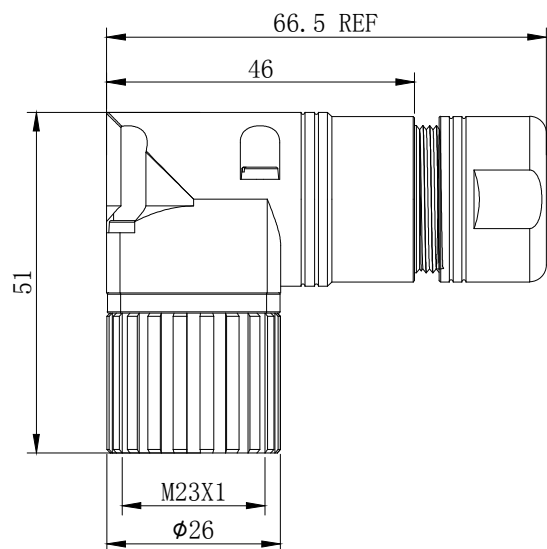
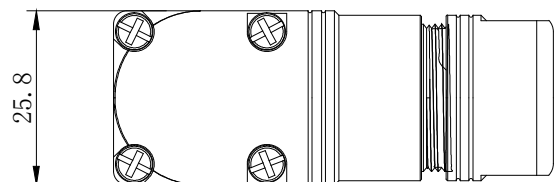



FEMALE END VIEW



SPECIFICATIONS

CONTACT CARRIER MATERIAL/COLOR	PBT/WHITE
CONTACT MATERIAL/PLATING	BRASS/GOLD
COUPLING NUT MATERIAL/PLATING	ZINC ALLOY/NICKEL
O-SEALING RING MATERIAL	NBR
RATED CURRENT	9A(PINS 6,12,19);2A(OTHERS)
RATED VOLTAGE	150 V
MAX.CONDUCTORS SIZE	3X18AWG;16X18AWG
TERMINATION METHOD	SOLDER
OPERATING TEMPERATURE	-40°C — +85°C
PROTECTION CLASS	IEC IP67
CABLE GRIP RANGE	6-10mm

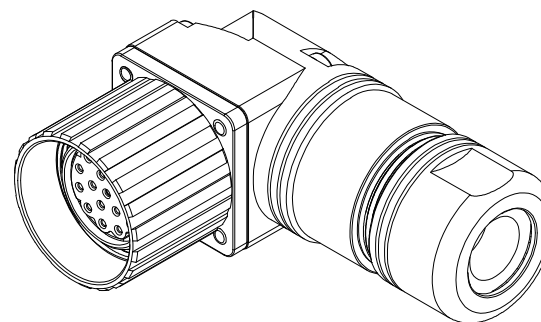

UNIT OF MEASUREMENT MILLIMETER		 Tianjin Geneuo Technology Co.,Ltd		
Approved: Date:	Date: 2019.3.18	Description: GNLK1928-0/M22/L		
Process: Date:	Scale: 1:1			
Checked: Date:	3RD Angle Projection		www.gsee-tech.cn www.gsee-tech.com	REV A
Designed: ZL Date: 2019.4.9				
		SOURCE DRAWING-FOR REFERENCE ONLY		

REV	COUNT	DESCRIPTION OF REVISIONS	BY	CHECKED	DATE

REV
A