



MALE END VIEW



1. BU
2. RD
3. BN
4. GY
5. GN/YE
6. RD/BU
7. GN
8. GY/PK
9. WH/GN
10. WH/YE
11. WH/GY
12. BK
13. YE/BN
14. BN/GN
15. WH
16. YE
17. PK

SPECIFICATIONS

CONTACT CARRIER MATERIAL/COLOR	PBT/WHITE
MOLDED HEAD MATERIAL/COLOR	TPU/BLACK
CONTACT MATERIAL/PLATING	BRASS/GOLD
COUPLING NUT MATERIAL/PLATING	ZINC ALLOY/NICKEL
RATED CURRENT	9A(POWER),2A(SIGNAL)
RATED VOLTAGE	150 V
OUTER CABLR JACKET MATERIAL/COLOR	PVC/BLACK
CONDUCTOR INSULATION MATERIAL	PVC
NUMBER OF CONDUCTORS (AWG)	3X18AWG+16X22AWG(CUT OFF VT,GY,BN)
OPERATING TEMPERATURE	-40°C — +80°C
PROTECTION CLASS	IEC IP67

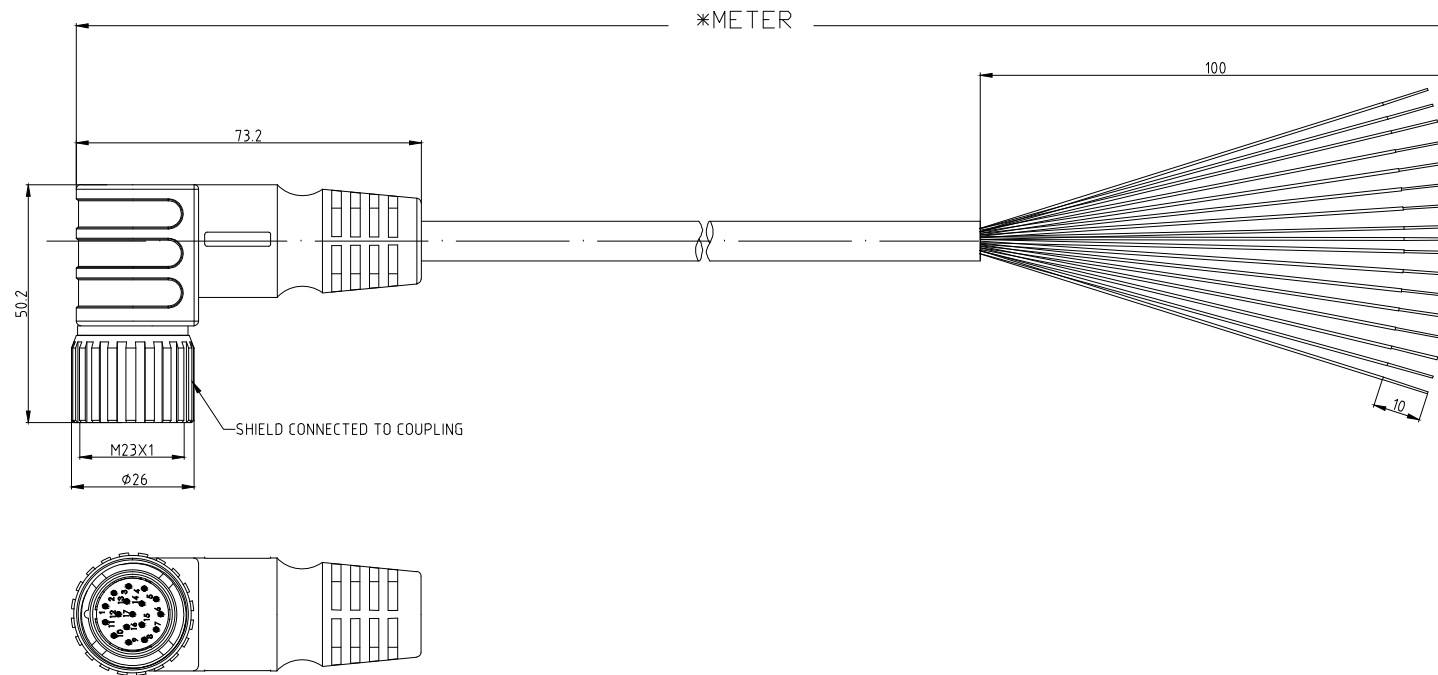

CABLE LENGTH	TOLERANCE
ALL LENGTHS	+4%(OR 50mm) OF LENGTH -0% (OR 0mm) OF LENGTH WHICHEVER IS GREATER
STRIP LENGTH	TOLERANCE
0 - 7mm	± 1.0mm
8 - 29mm	± 1.5mm
30 - 49mm	± 2.0mm
50 - 69mm	± 3.0mm
70 - 100mm	± 4.0mm
over 100mm	± 5.0mm

REV	COUNT	DESCRIPTION OF REVISIONS	BY	CHECKED	DATE

UNIT OF MEASUREMENT		GSEE TECH Tianjin Geneuo Technology Co.,Ltd		
MILLIMETER				
Approved: Date:	Date: 2019.3.15	Description: GNLZ17-17-xM/P00		
Process: Date:	Scale: 1:1			
Checked: Date:	3RD Angle Projection		www.gsee-tech.cn www.gsee-tech.com	REV A
Designed: ZL Date: 2019.3.15				
		SOURCE DRAWING-FOR REFERENCE ONLY		