

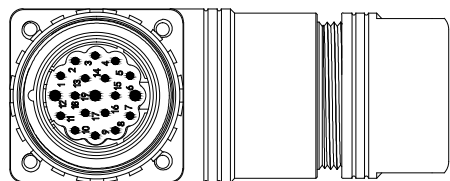
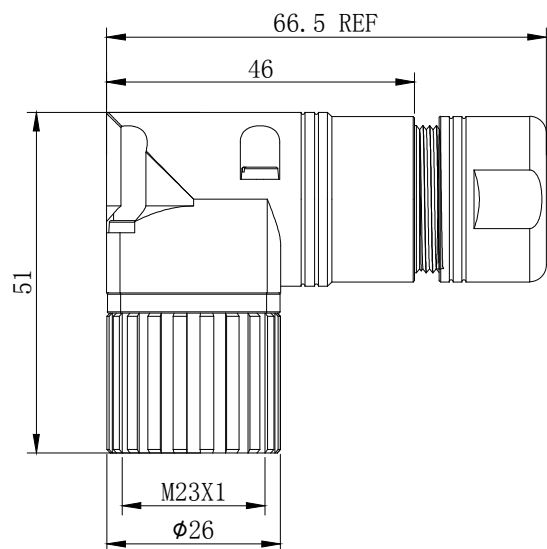
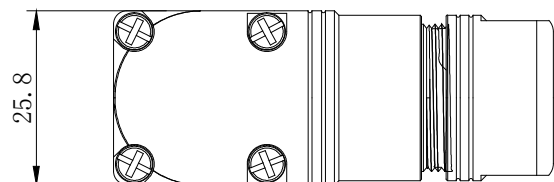


MALE END VIEW



SPECIFICATIONS

CONTACT CARRIER MATERIAL/COLOR	PBT/WHITE
CONTACT MATERIAL/PLATING	BRASS/GOLD
COUPLING NUT MATERIAL/PLATING	ZINC ALLOY/NICKEL
O-SEALING RING MATERIAL	NBR
RATED CURRENT	9A(PINS 6,12,19),2A(OTHERS)
RATED VOLTAGE	150 V
MAX.CONDUCTORS SIZE	3X18AWG;16X18AWG
TERMINATION METHOD	SOLDER
OPERATING TEMPERATURE	-40°C — +85°C
PROTECTION CLASS	IEC IP67
CABLE GRIP RANGE	6-10mm

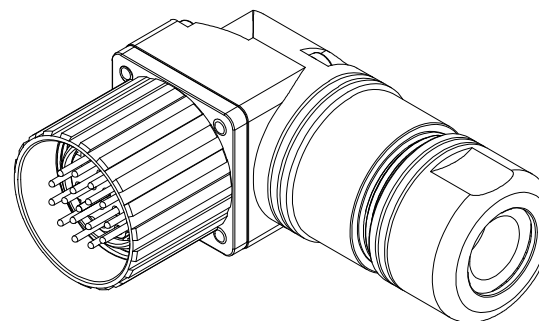

UNIT OF MEASUREMENT MILLIMETER			
		Tianjin Geneuo Technology Co.,Ltd	
Approved: Date:	Date: 2019.3.18	Description: GNLZ1928-0/M22/L	
Process: Date:	Scale: 1:1		
Checked: Date:	3RD Angle Projection		www.gsee-tech.cn www.gsee-tech.com
Designed: ZL Date: 2019.4.9			
REV	COUNT	DESCRIPTION OF REVISIONS	BY
CHECKED	DATE	SOURCE DRAWING-FOR REFERENCE ONLY	
		REV A	