


MALE END VIEW

1. N/C
 2. N/C
 3. GY
 4. RD/BU
 5. GN
 6. BU
 7. GY/PK
 8. WH/GN
 9. N/C
 10. N/C
 11. N/C
 12. GN/YE
 13. N/C
 14. BN/GN
 15. WH
 16. YE
 17. N/C
 18. N/C
 19. BN


1. N/C
2. N/C
3. GY
4. RD/BU
5. GN
6. BU
7. GY/PK
8. WH/GN
9. N/C
10. N/C
11. N/C
12. GN/YE
13. N/C
14. BN/GN
15. WH
16. YE
17. N/C
18. N/C
19. BN

SPECIFICATIONS	
CONTANCT CARRIER MATERIAL/COLOR	PBT/WHITE
MOLDED HEAD MATERIAL/COLOR	TPU/BLACK
CONTACT MATERIAL/PLATING	BRASS/GOLD
COUPLING NUT MATERIAL/PLATING	ZINC ALLOY/NICKEL
RATED CURRENT	9A(PINS 6,12,19),2A(ALL OTHERS)
RATED VOLTAGE	150 V
OUTER CABLR JACKET MATERIAL/COLOR	PVC/BLACK
CONDUCTOR INSULATION MATERIAL	PVC
NUMBER OF CONDUCTORS (AWG)	3X18AWG+8X22AWG
OPERATING TEMPERATURE	-40°C — +80°C
PROTECTION CLASS	IEC IP67

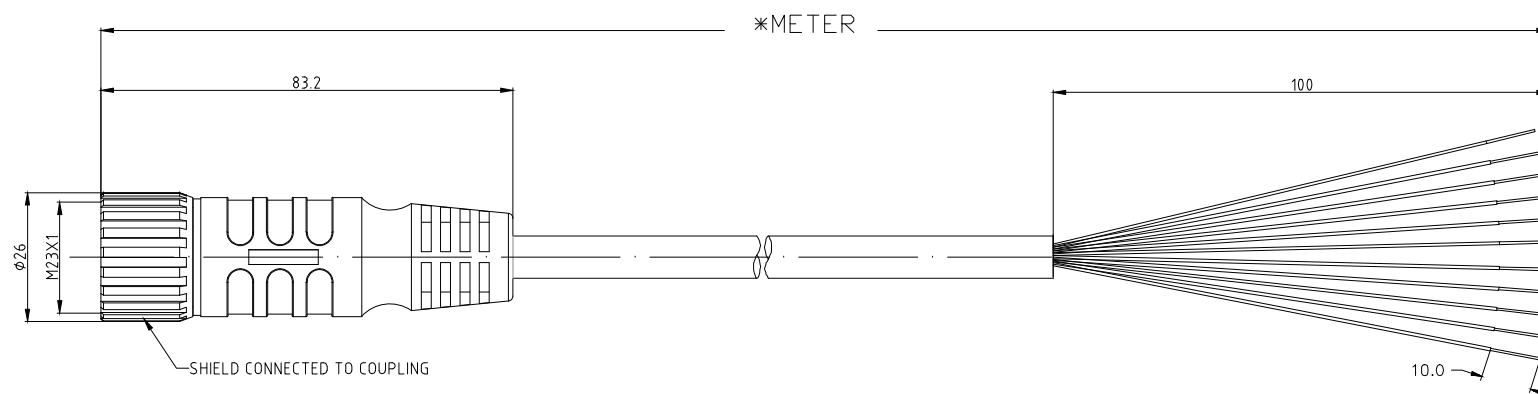

CABLE LENGTH	TOLERANCE
ALL LENGTHS	+4% (OR 50mm) OF LENGTH -0% (OR 0mm) OF LENGTH WHICHEVER IS GREATER
STRIP LENGTH	TOLERANCE
0 - 7mm	± 10mm
8 - 29mm	± 15mm
30 - 49mm	± 20mm
50 - 69mm	± 30mm
70 - 100mm	± 40mm
over 100mm	± 50mm

REV	COUNT	DESCRIPTION OF REVISIONS	BY	CHECKED	DATE

UNIT OF MEASUREMENT	 Tianjin Geneuo Technology Co.,Ltd			
MILLIMETER				
Approved: Date:	Date: 2019.3.15	Description: GNZ19-11-xM/P00		
Process: Date:	Scale: 1:1			
Checked: Date:	3RD Angle Projection		www.gsee-tech.cn www.gsee-tech.com	REV A
Designed: ZL Date: 2019.3.15			SOURCE DRAWING-FOR REFERENCE ONLY	