

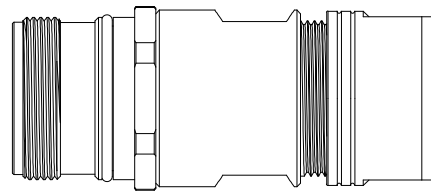
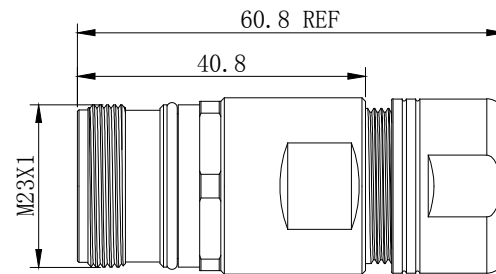



MALE END VIEW



SPECIFICATIONS	
CONTACT CARRIER MATERIAL/COLOR	PBT/WHITE
CONTACT MATERIAL/PLATING	BRASS/GOLD
COUPLING NUT MATERIAL/PLATING	ZINC ALLOY/NICKEL
O-SEALING RING MATERIAL	NBR
RATED CURRENT	20A(PINS 4,6,8);8A(PINS 1,2,3,5,7,9)
RATED VOLTAGE	150 V
MAX.CONDUCTORS SIZE	3X14AWG;6X18AWG
TERMINATION METHOD	SOLDER
OPERATING TEMPERATURE	-40°C — +85°C
PROTECTION CLASS	IEC IP67
CABLE GRIP RANGE	6-10mm

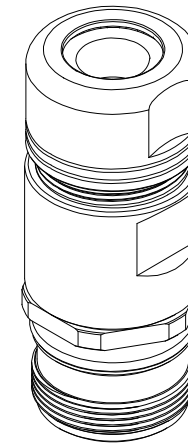

REV	COUNT	DESCRIPTION OF REVISIONS	BY	CHECKED	DATE

UNIT OF MEASUREMENT MILLIMETER		 Tianjin Geneuo Technology Co.,Ltd		
Approved: Date:	Date: 2019.3.18	Description: GWZ9628-0/M22/L		
Process: Date:	Scale: 1:1			
Checked: Date:	3RD Angle Projection		www.gsee-tech.cn www.gsee-tech.com	
Designed: ZL Date: 2019.4.9			SOURCE DRAWING-FOR REFERENCE ONLY	