MALE END VIEW



1. BU
2. RD
3. BN
4. GY
5. GN/YE
6. RD/BU
7. GN
8. GY/PK
9. WH/GN
10. WH/YE
11. WH/GY
12. BK
13. YE/BN
14. BN/GN
15. WH
16. YE
17. PK

SPECIFICATIONS	
CONTANCT CARRIER MATERIAL/COLOR	PBT/WHITE
MOLDED HEAD MATERIAL/COLOR	TPU/BLACK
CONTACT MATERIAL/PLATING	BRASS/GOLD
COUPLING NUT MATERIAL/PLATING	BRASS/NICKEL
RATED CURRENT	9 A
RATED VOLTAGE	150 V
OUTER CABLR JACKET MATERIAL/COLOR	PVC/BLACK
CONDUCTOR INSULATION MATERIAL	PVC
NUMBER OF CONDUCTORS (AWG)	17X18AWG
OPERATING TEMPERATURE	-40°C — +80°C
PROTECTION CLASS	IEC IP67

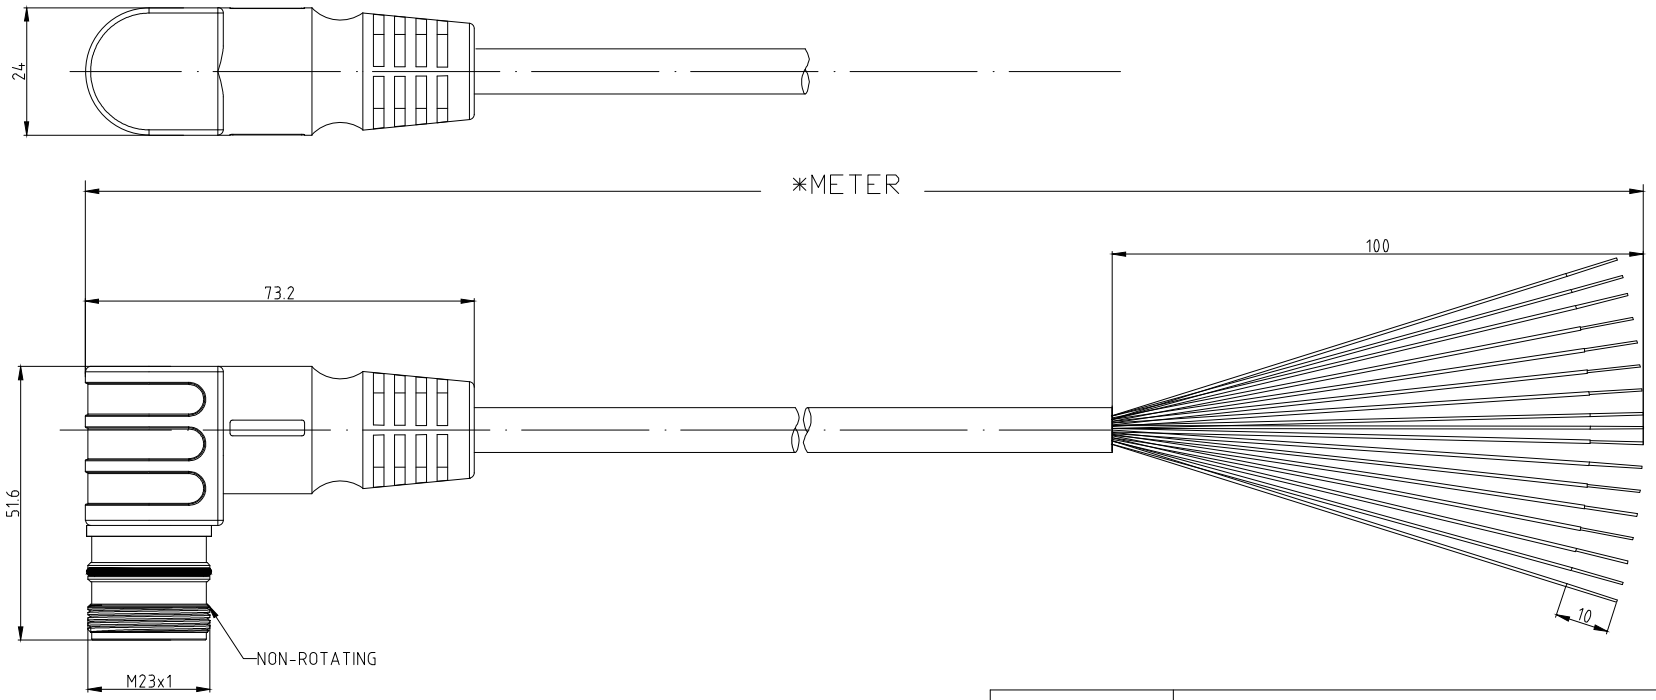

CABLE LENGTH	TOLERANCE
ALL LENGTHS	+4%(OR 50mm) OF LENGTH -0% (OR 0mm) OF LENGTH WHICHEVER IS GREATER

STRIP LENGTH	TOLERANCE
0 – 7mm	± 1.0mm
8 – 29mm	± 1.5mm
30 – 49mm	± 2.0mm
50 – 69mm	± 3.0mm
70 – 100mm	± 4.0mm
over 100mm	± 5.0mm

REV	COUNT	DESCRIPTION OF REVISIONS	BY	CHECKED	DATE

UNIT OF MEASUREMENT
MILLIMETER

Approved:
Date:

Process:
Date:

Checked:
Date:

Designed: ZL
Date: 2019.3.15

3RD Angle Projection

Tianjin Geneuo Technology Co.,Ltd

Date: 2019.3.15

Scale: 1:1

Description: GWLZ17-17-xM/P00

www.gsee-tech.cn
www.gsee-tech.com

REV A

SOURCE DRAWING-FOR REFERENCE ONLY