



MALE END VIEW



- 1. BN
- 2. BU
- 3. WH
- 4. GN/YE
- 5. OG
- 6. YE
- 7. GY
- 8. PK
- 9. RD
- 10. BN/WH
- 11. BU/WH
- 12. GN/WH

SPECIFICATIONS

CONTACT CARRIER MATERIAL/COLOR	PBT/WHITE
MOLDED HEAD MATERIAL/COLOR	TPU/BLACK
CONTACT MATERIAL/PLATING	BRASS/GOLD
COUPLING NUT MATERIAL/PLATING	BRASS/NICKEL
RATED CURRENT	6 A
RATED VOLTAGE	300 V
OUTER CABLR JACKET MATERIAL/COLOR	PVC/BLACK
CONDUCTOR INSULATION MATERIAL	PVC
NUMBER OF CONDUCTORS (AWG)	12X18AWG
OPERATING TEMPERATURE	-40°C — +80°C
PROTECTION CLASS	IEC IP67

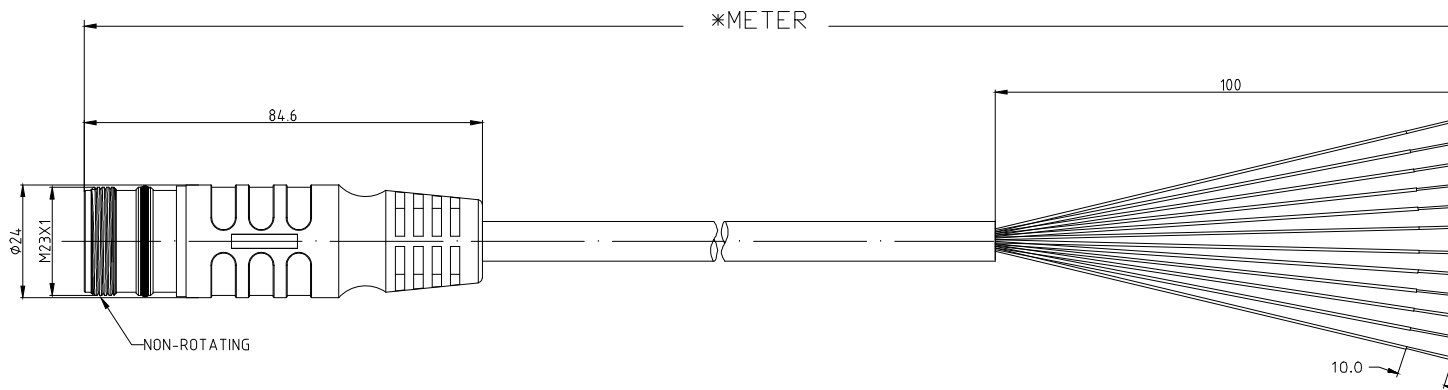

CABLE LENGTH	TOLERANCE
ALL LENGTHS	+4%(OR 50mm) OF LENGTH -0% (OR 0mm) OF LENGTH WHICHEVER IS GREATER
STRIP LENGTH	TOLERANCE
0 - 7mm	± 1.0mm
8 - 29mm	± 1.5mm
30 - 49mm	± 2.0mm
50 - 69mm	± 3.0mm
70 - 100mm	± 4.0mm
over 100mm	± 5.0mm

REV	COUNT	DESCRIPTION OF REVISIONS	BY	CHECKED	DATE

UNIT OF MEASUREMENT MILLIMETER	<b>GSEE TECH</b>	
<b>Tianjin Geneuo Technology Co.,Ltd</b>		
Approved: Date:	Date: 2019.3.15	Description: <b>GWZ12-12R-xM/P00</b>
Process: Date:	Scale: 1:1	
Checked: Date:	3RD Angle Projection	
Designed: ZL Date: 2019.3.15		
SOURCE DRAWING-FOR REFERENCE ONLY		REV <b>A</b>