




FEMALE END VIEW

J1-J6

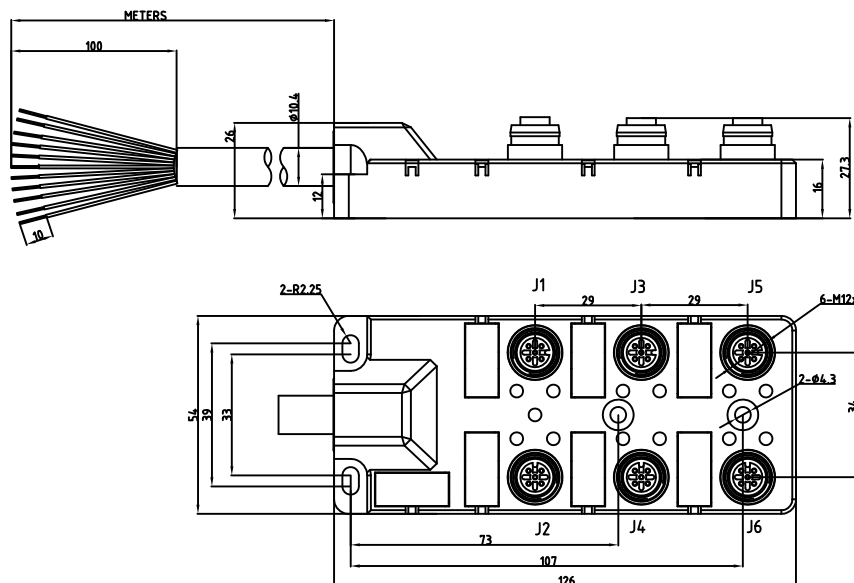

1 - V+
3 - V-
2 - Signal1
4 - Signal2
5 - PE

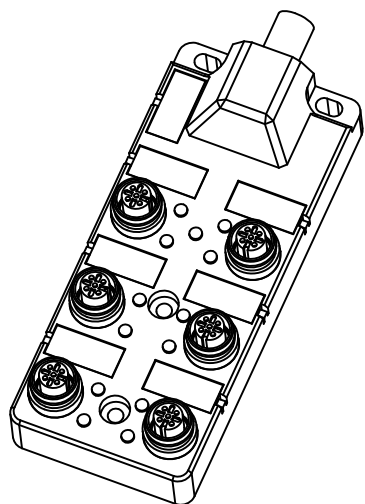


SPECIFICATIONS

HOUSING MATERIAL/COLOR	NYLON/BLACK
CONTACT CARRIER MATERIAL/COLOR	TPU/BLACK
CONTACTS	BRASS/GOLD
RECEPTACLE MATERIAL/PLATING	BRASS/NICKEL
O-RING MATERIAL	FPM/FKM
OPERATING CURRENT	2A PER SIGNAL, 9A TOTAL
OPERATING VOLTAGE	10-30V
OPERATING TEMPERATURE	-25°C — +80°C
PROTECTION CLASS	IEC IP67

WIRING DIAGRAM

NO LED

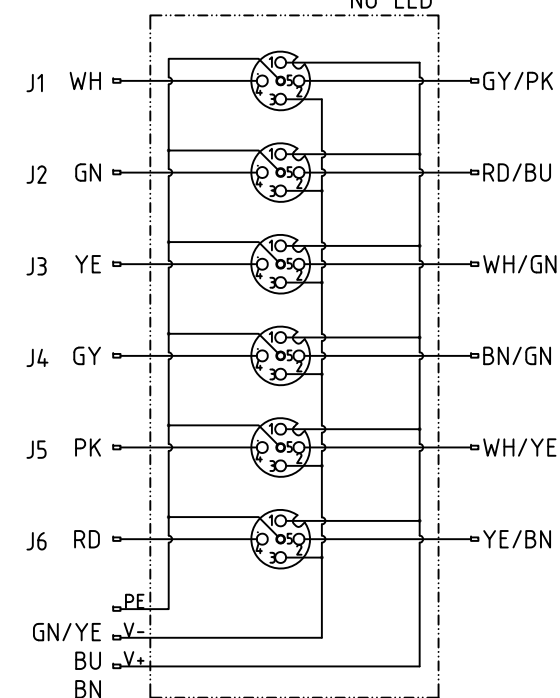

CABLE LENGTH

TOLERANCE

ALL LENGTHS

+4%(OR 50mm) OF LENGTH
-0%(OR 0mm) OF LENGTH
WHICHEVER IS GREATER

STRIP LENGTH

TOLERANCE

0 - 7mm	± 1.0mm
8 - 29mm	± 1.5mm
30 - 49mm	± 2.0mm
50 - 69mm	± 3.0mm
70 - 100mm	± 4.0mm
over 100mm	± 5.0mm

UNIT OF MEASUREMENT
MILLIMETER

Tianjin Geneuo Technology Co.,Ltd



Approved:
Date:

Date:
2018.5.16

Description:

JB6M12-4-D2-R


Process:
Date:

Scale:
1:1

Checked:
Date:

Designed:
Date:

3RD Angle
Projection



www.gsee-tech.cn
www.gsee-tech.com

SOURCE DRAWING-FOR REFERENCE ONLY

REV
A

REV	COUNT	DESCRIPTION OF REVISIONS	BY	CHECKED	DATE