


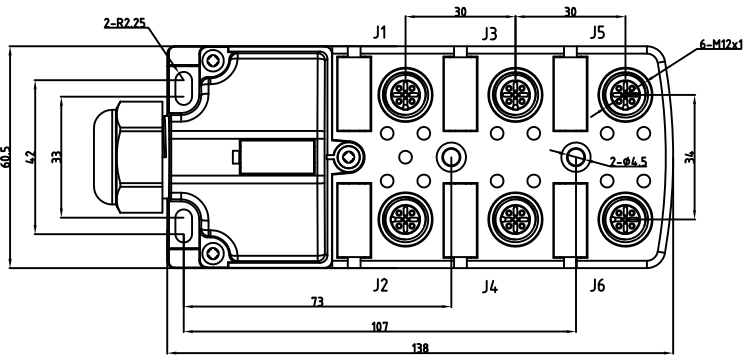
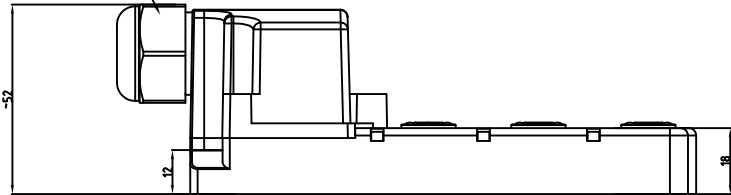



FEMALE END VIEW		MALE END VIEW	SPECIFICATIONS	
J1-J6			HOUSING MATERIAL/COLOR	NYLON/BLACK
			CONTACT CARRIER MATERIAL/COLOR	NYLON/BLACK
			CONTACTS	BRASS/GOLD
			RECEPTACLE MATERIAL/PLATING	BRASS/NICKEL
			O-RING MATERIAL	FPM/FKM
			OPERATING CURRENT	2A PER SIGNAL, 9A TOTAL
			OPERATING VOLTAGE	10-30V
			CONNECTION METHOD	SCREW CONNECTION
			OPERATING TEMPERATURE	-25°C — +85°C
			PROTECTION CLASS	IEC IP67

Pitch:3.5mm(0.138")


Wire Diameter 8.5-14mm (SW27)

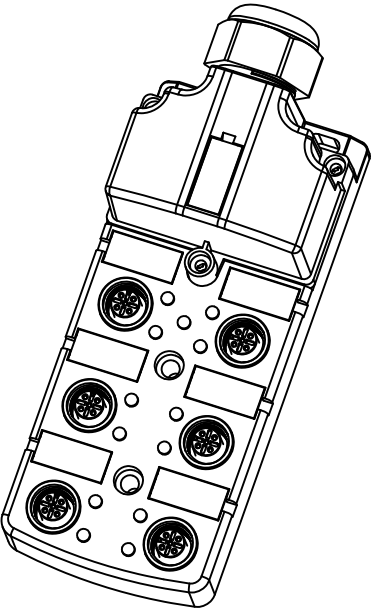

WIRING DIAGRAM

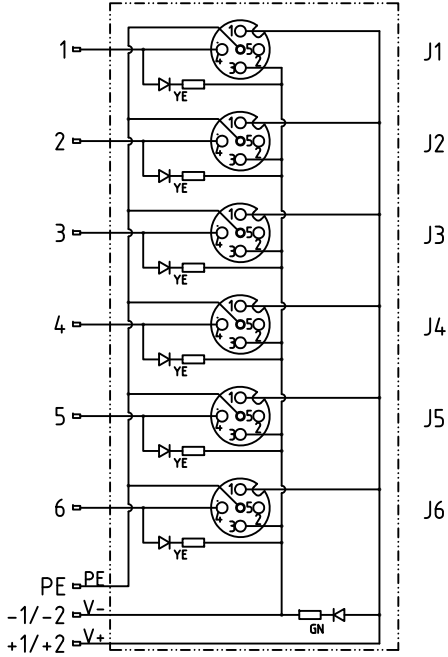

REV	COUNT	DESCRIPTION OF REVISIONS	BY	CHECKED	DATE

UNIT OF MEASUREMENT MILLIMETER		 Tianjin Geneuo Technology Co.,Ltd		
Approved: Date:	Date: 2018.5.16	Description: JB6M12-4P-J		
Process: Date:	Scale: 1:1			
Checked: Date:	3RD Angle Projection		www.gsee-tech.cn www.gsee-tech.com	REV A
Designed: Date:			SOURCE DRAWING-FOR REFERENCE ONLY	