


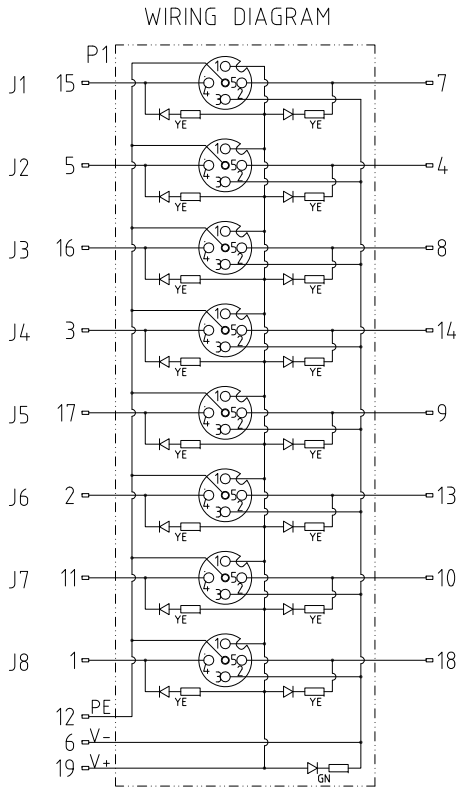
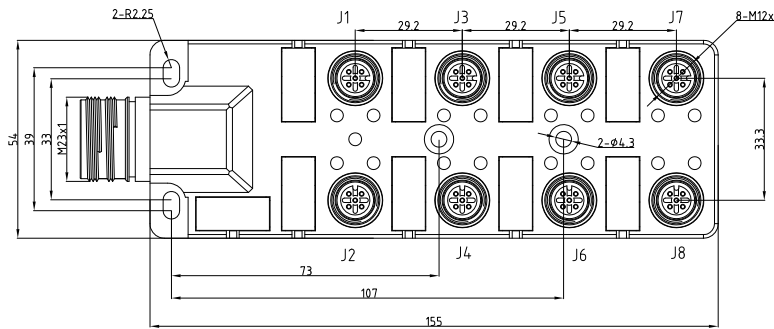
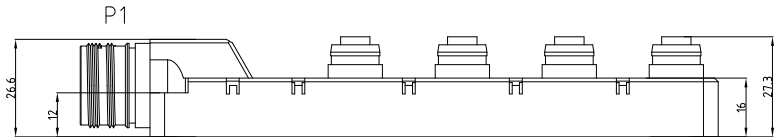
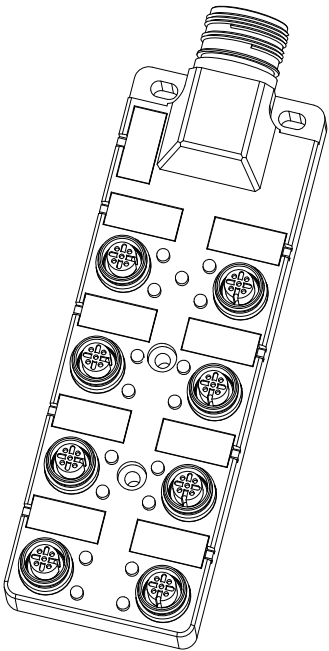


FEMALE END VIEW		MALE END VIEW		SPECIFICATIONS	
J1-J8	1 - V+ 3 - V- 4 - Signal1 2 - Signal2 5 - PE	P1	15=J1/4 7=J1/2 5=J2/4 4=J2/2 16=J3/4 8=J3/2 3=J4/4 14=J4/2 17=J5/4 9=J5/2 2=J6/4 13=J6/2 11=J7/4 10=J7/2 1=J8/4 18=J8/2 19=V+ 6=V- 12=PE	HOUSING MATERIAL/COLOR	NYLON/BLACK
				CONTACT CARRIER MATERIAL/COLOR	TPU/BLACK
				CONTACTS	BRASS/GOLD
				RECEPTACLE MATERIAL/PLATING	BRASS/NICKEL
				O-RING MATERIAL	FPM/FKM
				OPERATING CURRENT	2A PER SIGNAL,9A TOTAL
				OPERATING VOLTAGE	10-30V
				OPERATING TEMPERATURE	-25°C — +85°C
				PROTECTION CLASS	IEC IP67



REV	COUNT	DESCRIPTION OF REVISIONS	BY	CHECKED	DATE

UNIT OF MEASUREMENT MILLIMETER		 Tianjin Geneuo Technology Co.,Ltd		
Approved: Date:	Date: 2018.5.16	Description: JB8M12-4N-R		
Process: Date:	Scale: 1:1			
Checked: Date:	3RD Angle Projection		www.gsee-tech.cn www.gsee-tech.com	REV A
Designed: Date:			SOURCE DRAWING-FOR REFERENCE ONLY	