


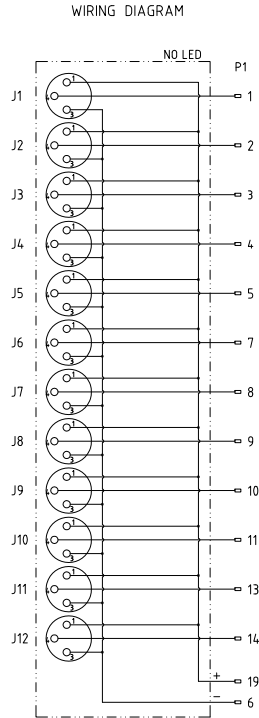
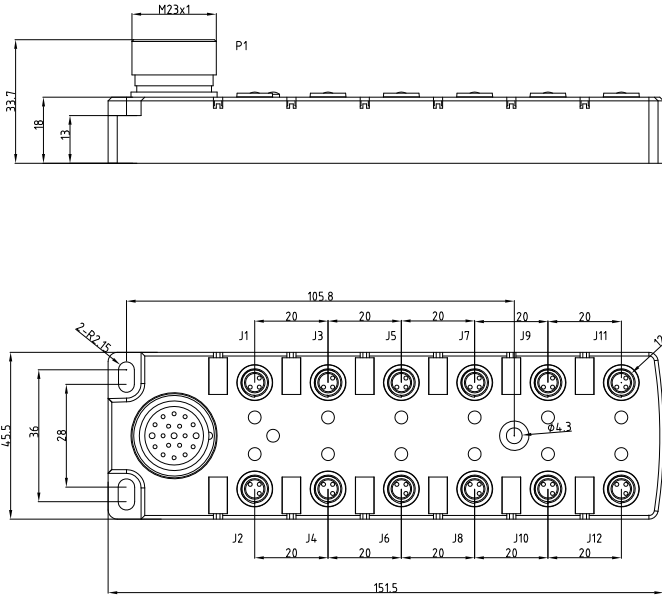
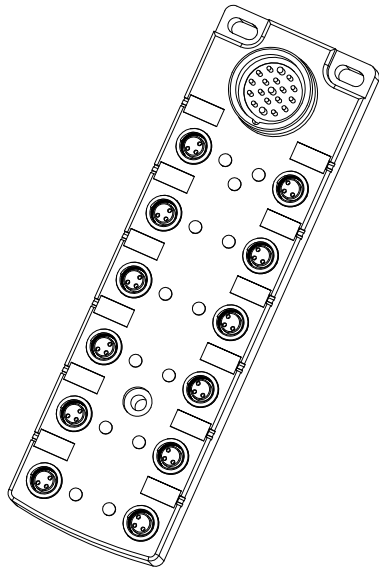


FEMALE END VIEW		MALE END VIEW		SPECIFICATIONS	
J1-J12		P1		HOUSING MATERIAL/COLOR	NYLON/BLACK
				CONTACT CARRIER MATERIAL/COLOR	NYLON/BLACK
1 - V+ 3 - V- 4 - Signal		1=J1/4 2=J2/4 3=J3/4 4=J4/4 5=J5/4 7=J6/4 8=J7/4 9=J8/4 10=J9/4 11=J10/4 13=J10/4 14=J12/4 19=V+ 6=V-		CONTACTS	BRASS/GOLD
				RECEPTACLE MATERIAL/PLATING	BRASS/NICKEL
				O-RING MATERIAL	FPM/FKM
				OPERATING CURRENT	2A PER SIGNAL,6A TOTAL
				OPERATING VOLTAGE	10-30V
				OPERATING TEMPERATURE	-25°C — +85°C
				PROTECTION CLASS	IEC IP67



REV	COUNT	DESCRIPTION OF REVISIONS	BY	CHECKED	DATE

UNIT OF MEASUREMENT MILLIMETER		 Tianjin Geneuo Technology Co.,Ltd			
Approved: Date:	Date: 2017.5.30		Description: JBW12M8-3-T		
Process: Date:	Scale: 1:1				
Checked: Date:	3RD Angle Projection		www.gsee-tech.cn www.gsee-tech.com		REV A
Designed: Date:			SOURCE DRAWING-FOR REFERENCE ONLY		