



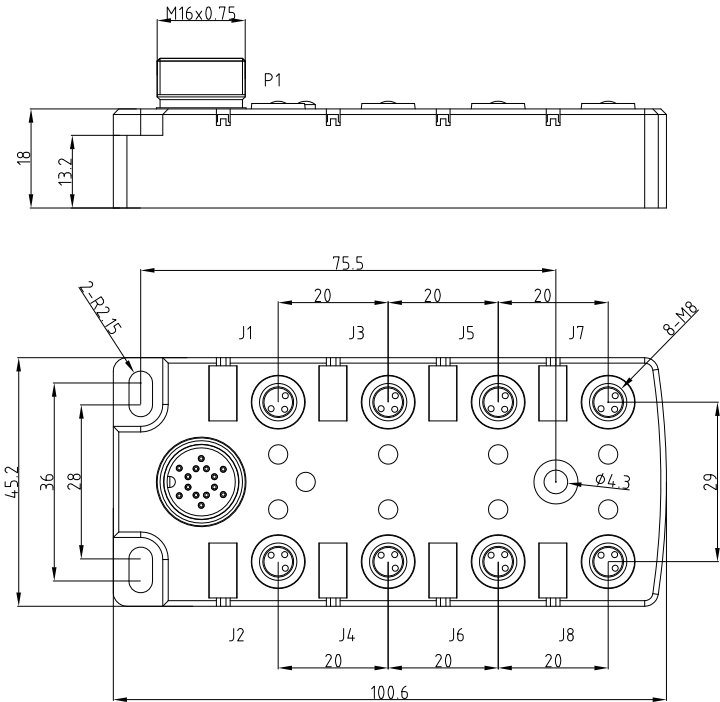



FEMALE END VIEW		MALE END VIEW		SPECIFICATIONS	
J1-J8		P1		HOUSING MATERIAL/COLOR	NYLON/BLACK
				CONTACT CARRIER MATERIAL/COLOR	NYLON/BLACK
1 - V+ 3 - V- 4 - Signal		P=J1/4 J=J2/4 T=J3/4 S=J4/4 G=J5/4 R=J6/4 E=J7/4 O=J8/4 A/M=V+ L/U=V-		CONTACTS	BRASS/GOLD
				RECEPTACLE MATERIAL/PLATING	BRASS/NICKEL
				O-RING MATERIAL	FKM/FPM
				OPERATING CURRENT	2A PER SIGNAL,6A TOTAL
				OPERATING VOLTAGE	10-30V
				OPERATING TEMPERATURE	-25°C — +85°C
				PROTECTION CLASS	IEC IP67

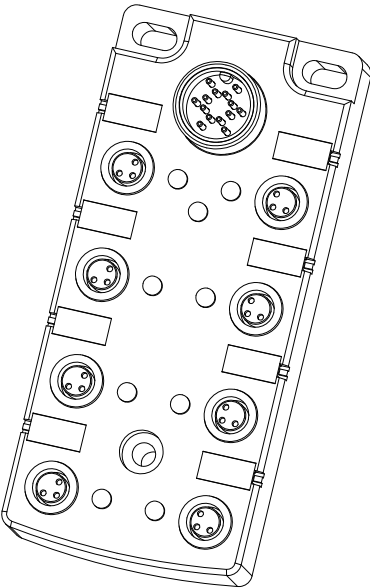

WIRING DIAGRAM

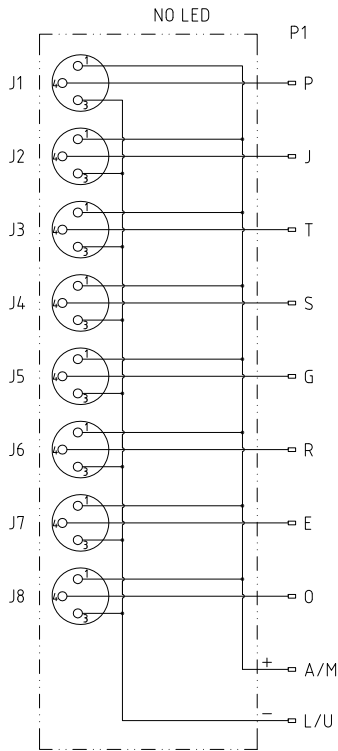

REV	COUNT	DESCRIPTION OF REVISIONS	BY	CHECKED	DATE

UNIT OF MEASUREMENT MILLIMETER		 Tianjin Geneuo Technology Co.,Ltd		
Approved: Date:	Date: 2017.5.30	Description: JBW8M8-3-M16		
Process: Date:	Scale: 1.5:1			
Checked: Date:	3RD Angle Projection		www.gsee-tech.cn www.gsee-tech.com	REV A
Designed: Date:			SOURCE DRAWING-FOR REFERENCE ONLY	