




FEMALE END VIEW



SPECIFICATIONS

| | |
|--------------------------------|---------------|
| CONTACT CARRIER MATERIAL/COLOR | TPU/BLACK |
| CONTACT MATERIAL/PLATING | BRASS/GOLD |
| HOUSING MATERIAL/COLOR | PA/BLACK |
| OPERATING VOLTAGE | 250V |
| OPERATING CURRENT | 12A |
| CONDUCTOR CROSS SECTION(AWG) | max.AWG 16 |
| CABLE DIAMETER | 6-8mm |
| TERMINATION | SCREW |
| OPERATING TEMPERATURE | -25°C — +85°C |
| PROTECTION CLASS | IEC IP67 |

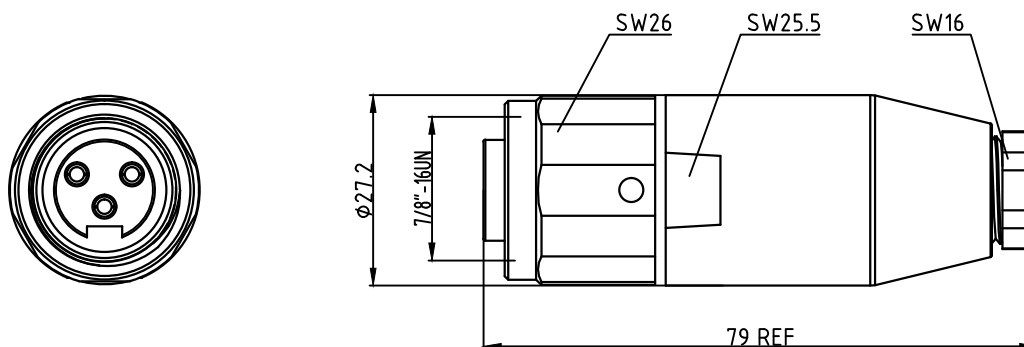

| | | | |
|-----------------------------------|-------------------------|---|---------------------------------------|
| UNIT OF MEASUREMENT MILLIMETER | | <div><div>GT</div><div>GSEE TECH</div></div> Tianjin Geneuo Technology Co.,Ltd | |
| Approved: Date: | Date: 2019.2.22 | Description: MK3212-0-9 | |
| Process: YJF Date: 2019.2.26 | Scale: 1:1 | | |
| Checked: WY Date: 2019.2.24 | 3RD Angle Projection |  | www.gsee-tech.cn www.gsee-tech.com |
| Designed: YYQ Date: 2019.2.22 | | | |
| | | REV A | |
| | | SOURCE DRAWING-FOR REFERENCE ONLY | |

| REV | COUNT | DESCRIPTION OF REVISIONS | BY | CHECKED | DATE |
|-----|-------|--------------------------|----|---------|------|
| | | | | | |
| | | | | | |
| | | | | | |
| | | | | | |

REV
A