


FEMALE END VIEW




1.RD
2.GN
3.WH
4.BK

SPECIFICATIONS

CONTACT CARRIER MATERIAL/COLOR	TPU/BLACK
MOLDED HEAD MATERIAL/COLOR	TPU/BLACK
CONTACTS	BRASS/GOLD
COUPLING NUT MATERIAL/PLATING	BRASS/NICKEL
RATED CURRENT	9 A
RATED VOLTAGE	600 V
CONDUCTOR INSULATION MATERIAL	PVC
NUMBER OF CONDUCTORS (AWG)	4X16AWG
OPERATING TEMPERATURE	-20°C — +80°C
PROTECTION CLASS	IEC IP67

* METERS

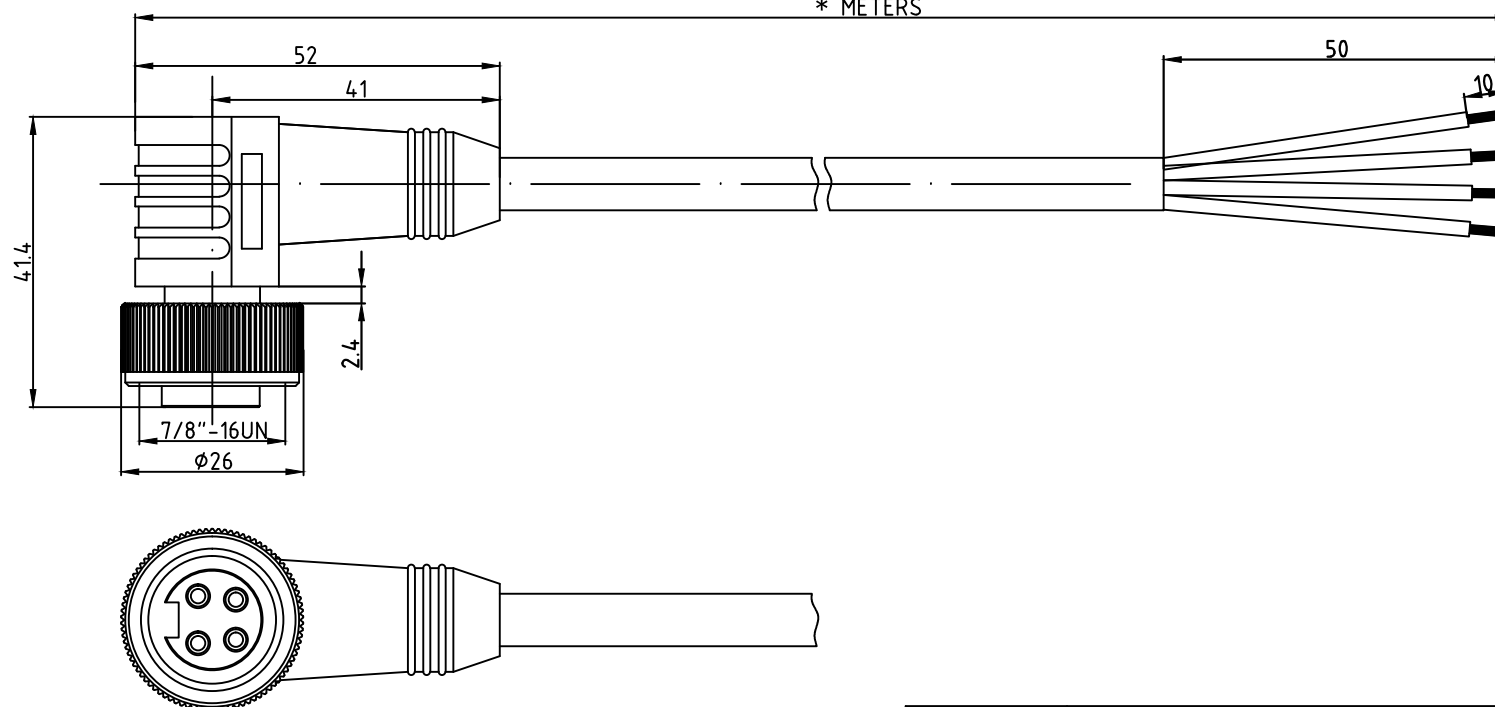

CABLE LENGTH	TOLERANCE
ALL LENGTHS	+4%(OR 50mm) OF LENGTH -0% (OR 0mm) OF LENGTH WHICHEVER IS GREATER
STRIP LENGTH	TOLERANCE
0 - 7mm	± 1.0mm
8 - 29mm	± 1.5mm
30 - 49mm	± 2.0mm
50 - 69mm	± 3.0mm
70 - 100mm	± 4.0mm
over 100mm	± 5.0mm

REV	COUNT	DESCRIPTION OF REVISIONS	BY	CHECKED	DATE

UNIT OF MEASUREMENT MILLIMETER	Tianjin Geneuo Technology Co.,Ltd	
Approved: Date:	Date: 2019.3.6	Description: MLK4-xM
Process:YJF Date:2019.3.8	Scale: 1:1	www.gsee-tech.cn www.gsee-tech.com
Checked:WY Date:2019.3.6	3RD Angle Projection	
Designed: ZL Date: 2019.3.6		REV A
SOURCE DRAWING-FOR REFERENCE ONLY		