
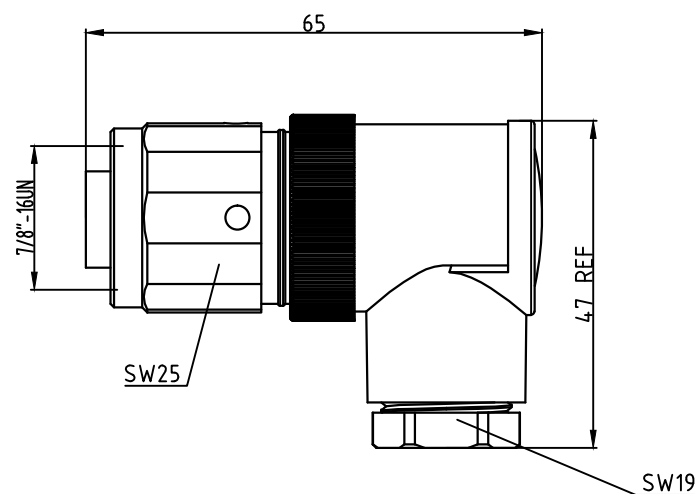
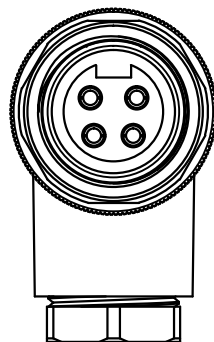



A technical diagram showing the female end view of a plug gage. It features a circular body with four internal circular holes arranged in a square pattern. A central rectangular slot is located at the bottom of the circle. Four callout lines with numbers point to specific features: '1' points to the top-right internal hole, '2' points to the bottom-right internal hole, '3' points to the top-left internal hole, and '4' points to the bottom-left internal hole.



SPECIFICATIONS	
CONTACT CARRIER MATERIAL/COLOR	TPU/BLACK
CONTACT MATERIAL/PLATING	BRASS/GOLD
HOUSING MATERIAL/COLOR	PA/BLACK
OPERATING VOLTAGE	250V
OPERATING CURRENT	9A
CONDUCTOR CROSS SECTION(AWG)	max.AWG 16
CABLE DIAMETER	8-10mm
TERMINATION	SCREW
OPERATING TEMPERATURE	-25°C — +85°C
PROTECTION CLASS	IEC IP67

UNIT OF MEASUREMENT			
MILLIMETER			
Tianjin Geneuo Technology Co.,Ltd			
Approved: Date:	Date: 2019.2.22	Description: MLK4212-0-11	
Process: YJF Date: 2019.2.26	Scale: 1:1		
Checked: WY Date: 2019.2.24	3RD Angle Projection 	www.gsee-tech.cn www.gsee-tech.com	REV A
Designed: YYQ Date: 2019.2.22		SOURCE DRAWING-FOR REFERENCE ONLY	