

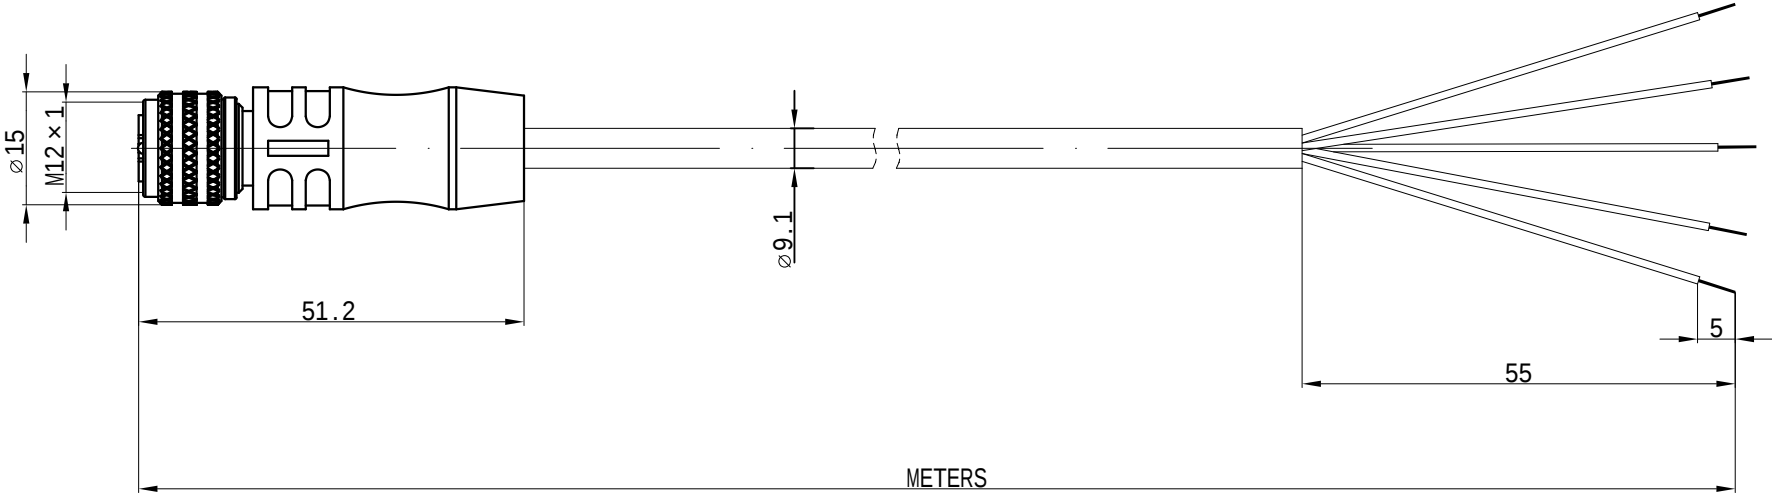


FEMALE END VIEW		SPECIFICATIONS	
 1=BN 2=WH 3=BU 4=BK PE=GN/YE		CONTACT CARRIER MATERIAL/COLOR	TPU/BLACK
		MOLDED HEAD MATERIAL/COLOR	TPU/BLACK
		CONTACT/PLATING	BRASS/GOLD
		COUPLING NUT MATERIAL/PLATING	BRASS/NICKEL
		OPERATING CURRENT	12 A
		OPERATING VOLTAGE	630 V
		CONDUCTOR INSULATION MATERIAL	PVC
		NUMBER OF CONDUCTORS (AWG)/SHIELD	5 x 16 AWG
		OPERATING TEMPERATURE	-20 ° C — +80 ° C
		PROTECTION CLASS	IEC IP67



CABLE LENGTH	TOLERANCE
ALL LENGTHS	+4%(OR 50mm) OF LENGTH -0% (OR 0mm) OF LENGTH WHICHEVER IS GREATER
STRIP LENGTH	TOLERANCE
0 - 7mm	± 1.0mm
8 - 29mm	± 1.5mm
30 - 49mm	± 2.0mm
50 - 69mm	± 3.0mm
70 - 100mm	± 4.0mm
over 100mm	± 5.0mm

REV	COUNT	DESCRIPTION OF REVISIONS	BY	CHECKED	DATE

UNIT OF MEASUREMENT MILLIMETER		GSEE TECH Tianjin Geneuo Technology Co.,Ltd		
Approved: Date:	Date: 2018.4.16	Description: PK-EK5- M/S10		
Process:YJ_F Date:2018.5.24	Scale: 1:1			
Checked:WY Date:2018.5.3	3RD Angle Projection		www.gsee-tech.cn www.gsee-tech.com	REV A
Designed:LXH Date:2018.4.27			SOURCE DRAWING-FOR REFERENCE ONLY	