



MALE END VIEW



1=BN
2=WH
3=BU
4=BK
PE=GN/YE

SPECIFICATIONS

CONTACT CARRIER MATERIAL/COLOR	TPU/BLACK
MOLDED HEAD MATERIAL/COLOR	TPU/BLACK
CONTACT/PLATING	BRASS/GOLD
COUPLING NUT MATERIAL/PLATING	BRASS/NICKEL
O-RING MATERIAL	FPM/FKM
OPERATING CURRENT	12 A
OPERATING VOLTAGE	630 VAC
CONDUCTOR INSULATION MATERIAL	PVC
NUMBER OF CONDUCTORS (AWG)/SHIELD	5 x 16 AWG
OPERATING TEMPERATURE	-20°C — +80°C
PROTECTION CLASS	IEC IP67

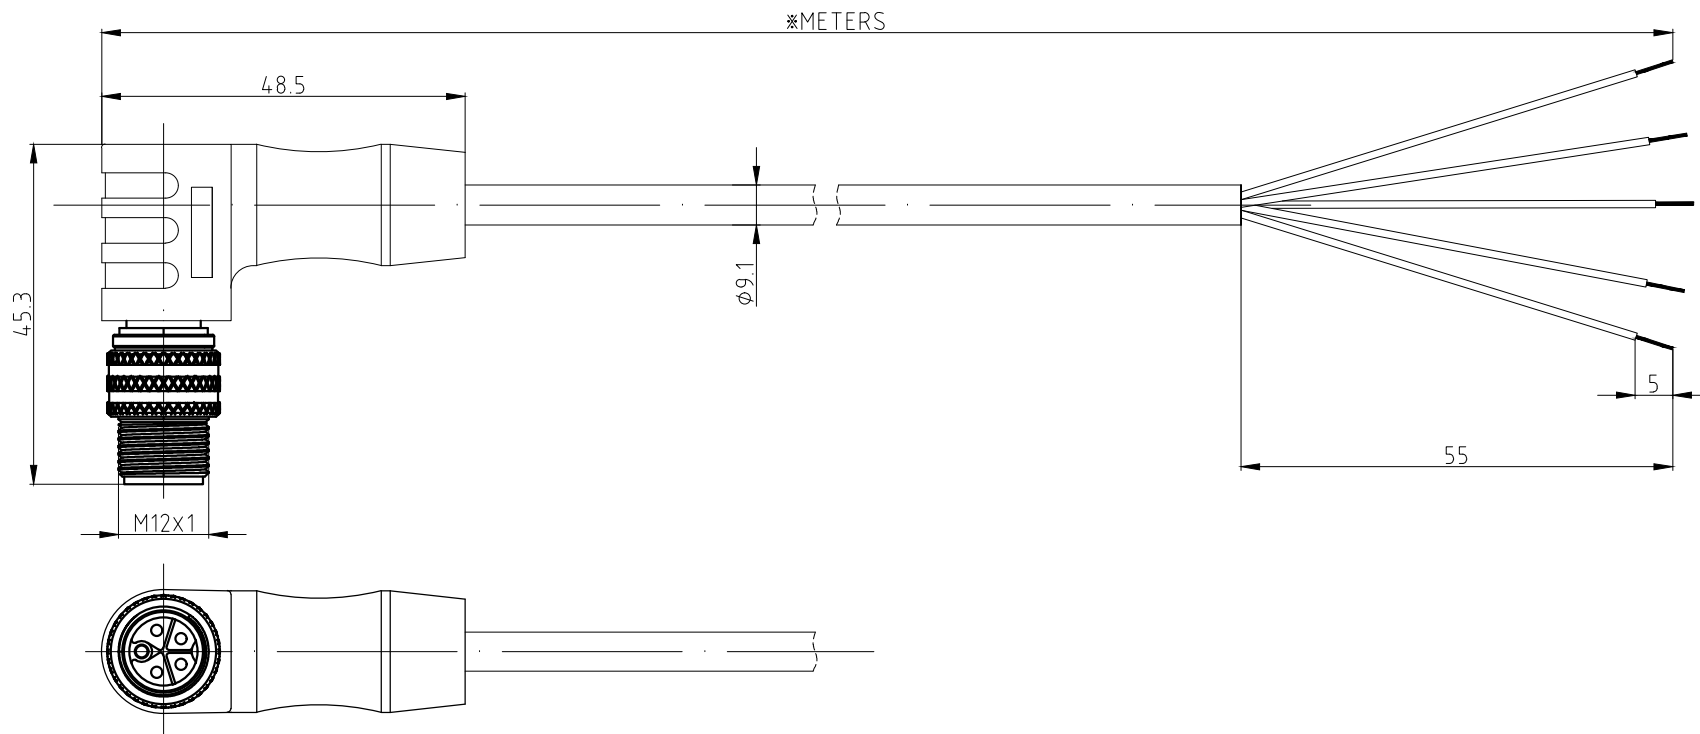

CABLE LENGTH TOLERANCE

ALL LENGTHS
+4% (OR 50mm) OF LENGTH
-0% (OR 0mm) OF LENGTH
WHICHEVER IS GREATER

STRIP LENGTH	TOLERANCE
0 - 7mm	± 1.0mm
8 - 29mm	± 1.5mm
30 - 49mm	± 2.0mm
50 - 69mm	± 3.0mm
70 - 100mm	± 4.0mm
over 100mm	± 5.0mm

REV	COUNT	DESCRIPTION OF REVISIONS	BY	CHECKED	DATE

UNIT OF MEASUREMENT
MILLIMETER

Tianjin Geneuo Technology Co.,Ltd


Approved:
Date:
Process:YJ F
Date:2018.5.24

Date: 2018.4.16

Scale: 1:1

Checked:WY
Date:2018.5.3
Designed:LXH
Date:2018.4.27

3RD Angle
Projection



Description:
PK-ELZ5-※M/P00

www.gsee-tech.cn
www.gsee-tech.com

SOURCE DRAWING-FOR REFERENCE ONLY

REV
A

