


MALE END VIEW



1=BN


2=WH

3=BU

4=BK

PE=GN/YE

SPECIFICATIONS	
CONTACT CARRIER MATERIAL/COLOR	TPU/BLACK
MOLDED HEAD MATERIAL/COLOR	TPU/BLACK
CONTACT/PLATING	BRASS/GOLD
COUPLING NUT MATERIAL/PLATING	BRASS/NICKEL
OPERATING CURRENT	12 A
OPERATING VOLTAGE	630 V
CONDUCTOR INSULATION MATERIAL	PVC
NUMBER OF CONDUCTORS (AWG)/SHIELD	5 x 16 AWG
OPERATING TEMPERATURE	-20 ° C — +80 ° C
PROTECTION CLASS	IEC IP67

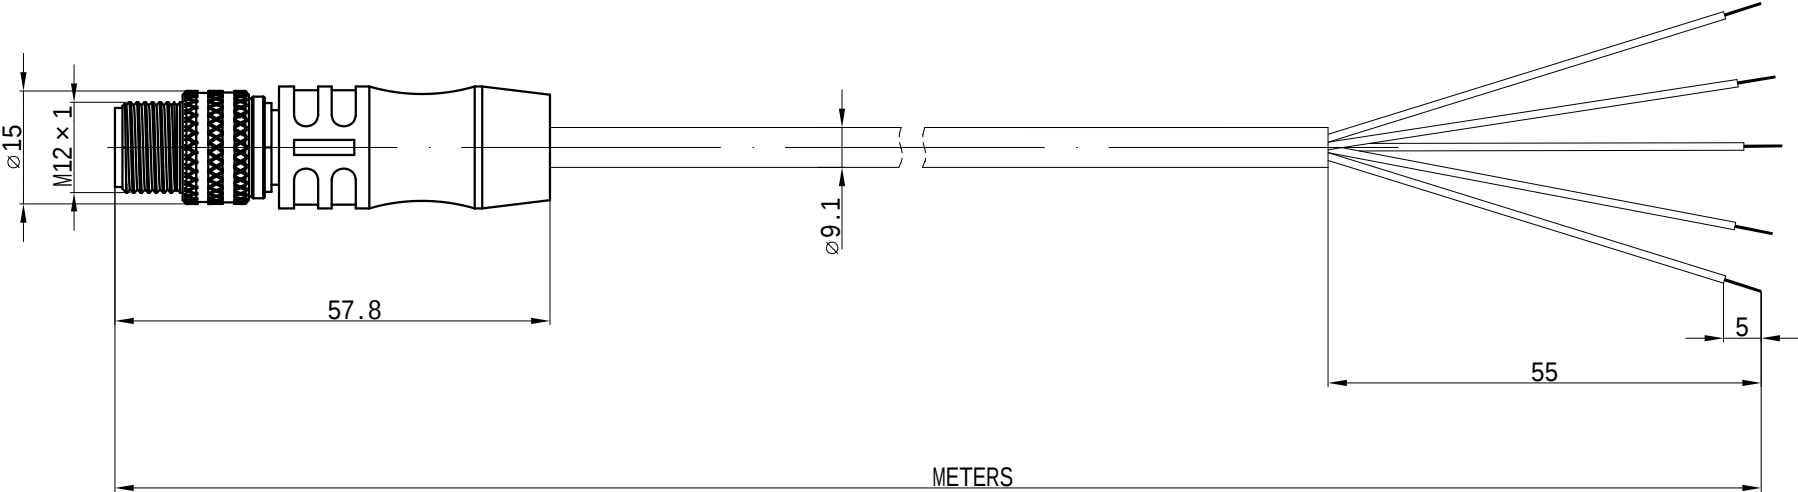

CABLE LENGTH	TOLERANCE
ALL LENGTHS	+4%(OR 50mm) OF LENGTH -0% (OR 0mm) OF LENGTH WHICHEVER IS GREATER
STRIP LENGTH	TOLERANCE
0 - 7mm	± 1.0mm
8 - 29mm	± 1.5mm
30 - 49mm	± 2.0mm
50 - 69mm	± 3.0mm
70 - 100mm	± 4.0mm
over 100mm	± 5.0mm

REV	COUNT	DESCRIPTION OF REVISIONS	BY	CHECKED	DATE

UNIT OF MEASUREMENT
MILLIMETER

Approved:
Date:

Date: 2018.4.16


Process:YJ.F
Date:2018.5.24

Checked:WY
Date:2018.5.3

Designed:LXH
Date:2018.4.27

Tianjin Geneuo Technology Co.,Ltd

3RD Angle Projection



Description:
PK-EZ5- M/S10

www.gsee-tech.cn
www.gsee-tech.com

REV
A

SOURCE DRAWING-FOR REFERENCE ONLY