


FEMALE END VIEW

A circular diagram representing the female end view of a 4-flange coupling. The circle is divided into four quadrants by a vertical and a horizontal line. The top quadrant is labeled 'PE' in a circle. The bottom quadrant is labeled '2' in a circle. The left quadrant is labeled '4' in a circle. The right quadrant is labeled '1' in a circle.


1=BN
2=WH
3=BU
4=BK
PE=GN/YE



1=BN
2=WH
3=BU
4=BK
PE=GN/YE


SPECIFICATIONS	
CONTACT CARRIER MATERIAL/COLOR	TPU/BLACK
MOLDED HEAD MATERIAL/COLOR	TPU/BLACK
CONTACT/PLATING	BRASS/GOLD
COUPLING NUT MATERIAL/PLATING	BRASS/NICKEL
O-RING MATERIAL	FPM/FKM
OPERATING CURRENT	16 A
OPERATING VOLTAGE	63 V
CONDUCTOR INSULATION MATERIAL	PVC
NUMBER OF CONDUCTORS (AWG)/SHIELD	5 x 16 AWG
OPERATING TEMPERATURE	-20°C — +80°C
PROTECTION CLASS	IEC IP67

CONTACT CARRIER MATERIAL/COLOR	TPU/BLACK
MOLDED HEAD MATERIAL/COLOR	TPU/BLACK
CONTACT/PLATING	BRASS/GOLD
COUPLING NUT MATERIAL/PLATING	BRASS/NICKEL
O-RING MATERIAL	FPM/FKM
OPERATING CURRENT	16 A
OPERATING VOLTAGE	63 V
CONDUCTOR INSULATION MATERIAL	PVC
NUMBER OF CONDUCTORS (AWG)/SHIELD	5 x 16 AWG
OPERATING TEMPERATURE	-20°C — +80°C
PROTECTION CLASS	IEC IP67

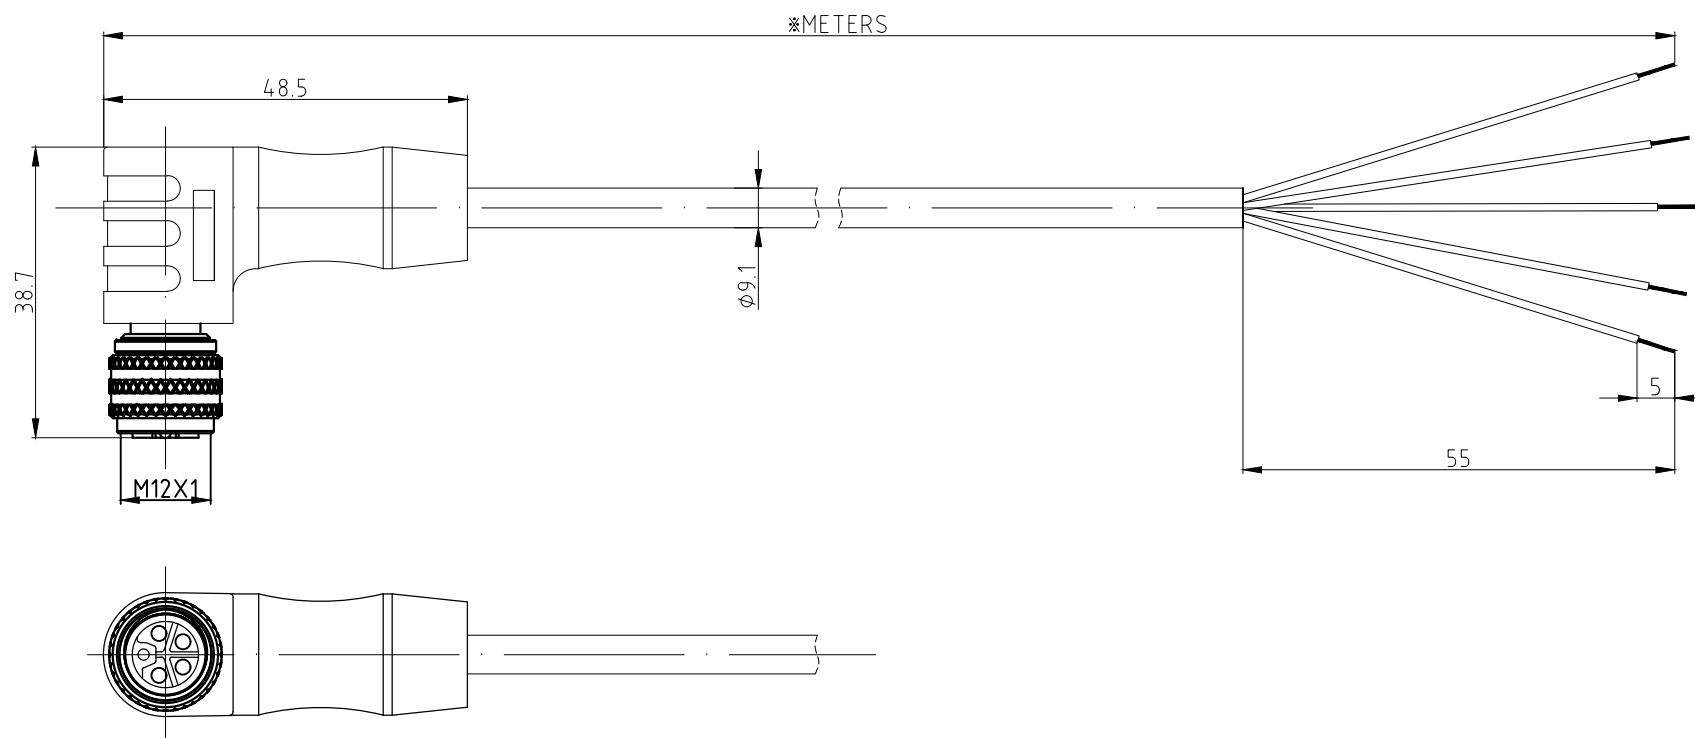

CABLE LENGTH	TOLERANCE
ALL LENGTHS	+4%(OR 50mm) OF LENGTH -0% (OR 0mm) OF LENGTH WHICHEVER IS GREATER
STRIP LENGTH	TOLERANCE
0 - 7mm	± 1.0mm
8 - 29mm	± 1.5mm
30 - 49mm	± 2.0mm
50 - 69mm	± 3.0mm
70 - 100mm	± 4.0mm
over 100mm	± 5.0mm

REV	COUNT	DESCRIPTION OF REVISIONS	BY	CHECKED	DATE

UNIT OF MEASUREMENT		 Tianjin Geneuo Technology Co.,Ltd	
MILLIMETER			
Approved: Date:	Date: 2018.4.16	Description: PL-ELK5-※M/P00	
Process:YJF Date:2018.5.24	Scale: 1:1		
Checked:WY Date:2018.5.3	3RD Angle Projection 	www.gsee-tech.cn www.gsee-tech.com	REV A
Designed:LXH Date:2018.4.27		SOURCE DRAWING-FOR REFERENCE ONLY	