



# MALE END VIEW



1=BN  
2=WH  
3=BU  
4=BK  
PE=GN/YE

## SPECIFICATIONS

|                                   |               |
|-----------------------------------|---------------|
| CONTACT CARRIER MATERIAL/COLOR    | TPU/BLACK     |
| MOLDED HEAD MATERIAL/COLOR        | TPU/BLACK     |
| CONTACT/PLATING                   | BRASS/GOLD    |
| COUPLING NUT MATERIAL/PLATING     | BRASS/NICKEL  |
| O-RING MATERIAL                   | FPM/FKM       |
| OPERATING CURRENT                 | 16 A          |
| OPERATING VOLTAGE                 | 63 VAC        |
| CONDUCTOR INSULATION MATERIAL     | PVC           |
| NUMBER OF CONDUCTORS (AWG)/SHIELD | 5 x 16 AWG    |
| OPERATING TEMPERATURE             | -20°C — +80°C |
| PROTECTION CLASS                  | IEC IP67      |

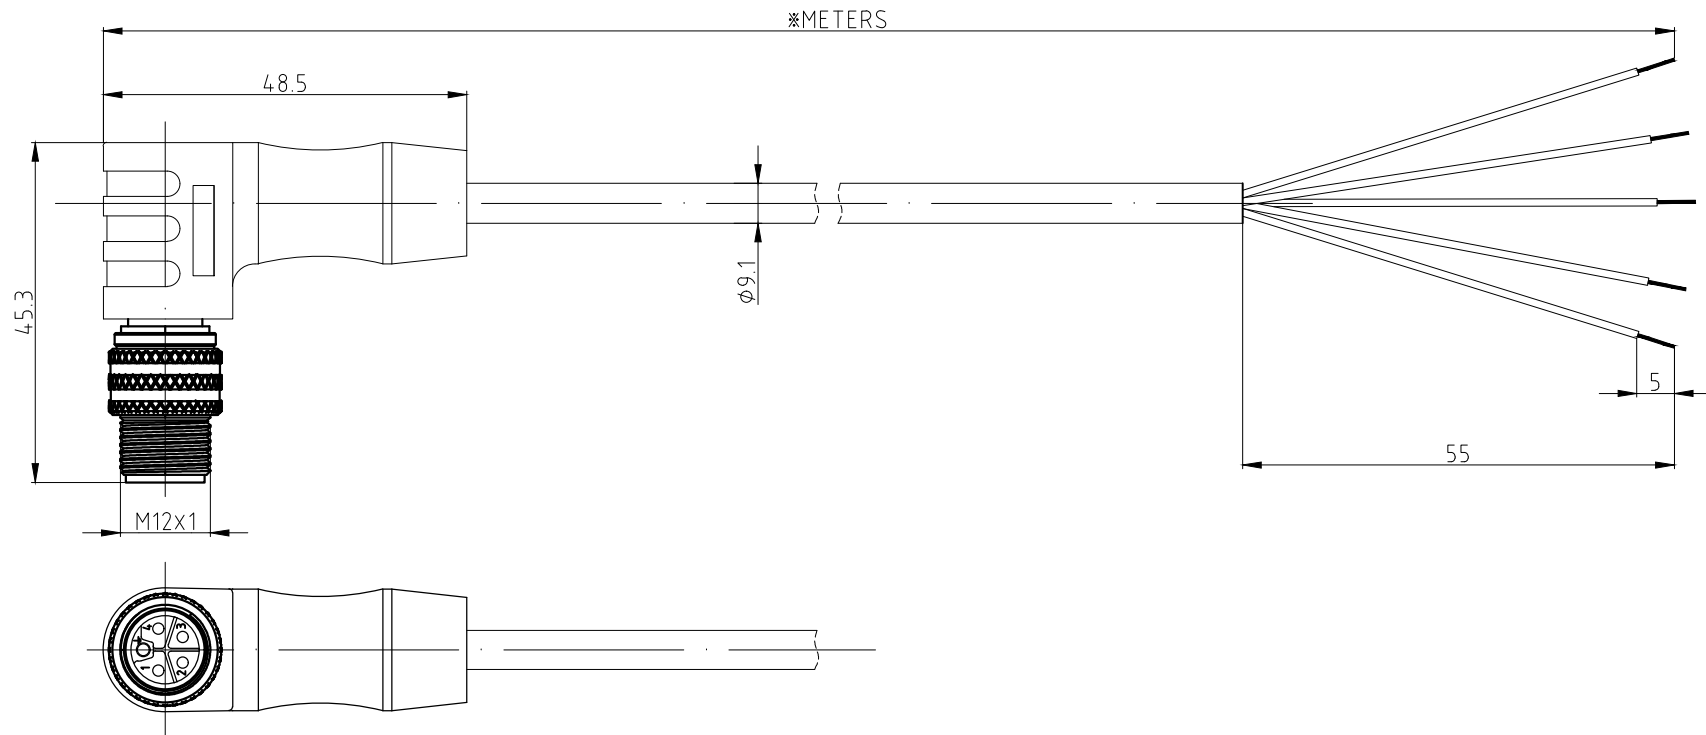

## CABLE LENGTH TOLERANCE

ALL LENGTHS  
+4% (OR 50mm) OF LENGTH  
-0% (OR 0mm) OF LENGTH  
WHICHEVER IS GREATER

## STRIP LENGTH TOLERANCE

|            |         |
|------------|---------|
| 0 - 7mm    | ± 1.0mm |
| 8 - 29mm   | ± 1.5mm |
| 30 - 49mm  | ± 2.0mm |
| 50 - 69mm  | ± 3.0mm |
| 70 - 100mm | ± 4.0mm |
| over 100mm | ± 5.0mm |

| REV | COUNT | DESCRIPTION OF REVISIONS | BY | CHECKED | DATE |
|-----|-------|--------------------------|----|---------|------|
|     |       |                          |    |         |      |
|     |       |                          |    |         |      |
|     |       |                          |    |         |      |
|     |       |                          |    |         |      |
|     |       |                          |    |         |      |

UNIT OF MEASUREMENT  
MILLIMETER


Tianjin Geneuo Technology Co.,Ltd

Approved:  
Date:  
Process:YJ F  
Date:2018.5.24  
Checked:WY  
Date:2018.5.3  
Designed:LXH  
Date:2018.4.27

Date: 2018.4.16  
Scale: 1:1

Description:  
PL-ELZ5-※M/P00

3RD Angle  
Projection



www.gsee-tech.cn  
www.gsee-tech.com

REV  
A

SOURCE DRAWING-FOR REFERENCE ONLY

