



MALE END VIEW



1=BK1
2=BK2
3=BK3
4=GN/YE

SPECIFICATIONS



CONTACT CARRIER MATERIAL/COLOR	TPU/BLACK
MOLDED HEAD MATERIAL/COLOR	TPU/BLACK
CONTACT/PLATING	BRASS/GOLD
COUPLING NUT MATERIAL/PLATING	BRASS/NICKEL
OPERATING CURRENT	12 A
OPERATING VOLTAGE	630 VAC
CONDUCTOR INSULATION MATERIAL	PVC
NUMBER OF CONDUCTORS (AWG)/SHIELD	4 x 16 AWG/POLYESTER FOIL SHIELD
OPERATING TEMPERATURE	-20 °C — +80 °C
PROTECTION CLASS	IEC IP67

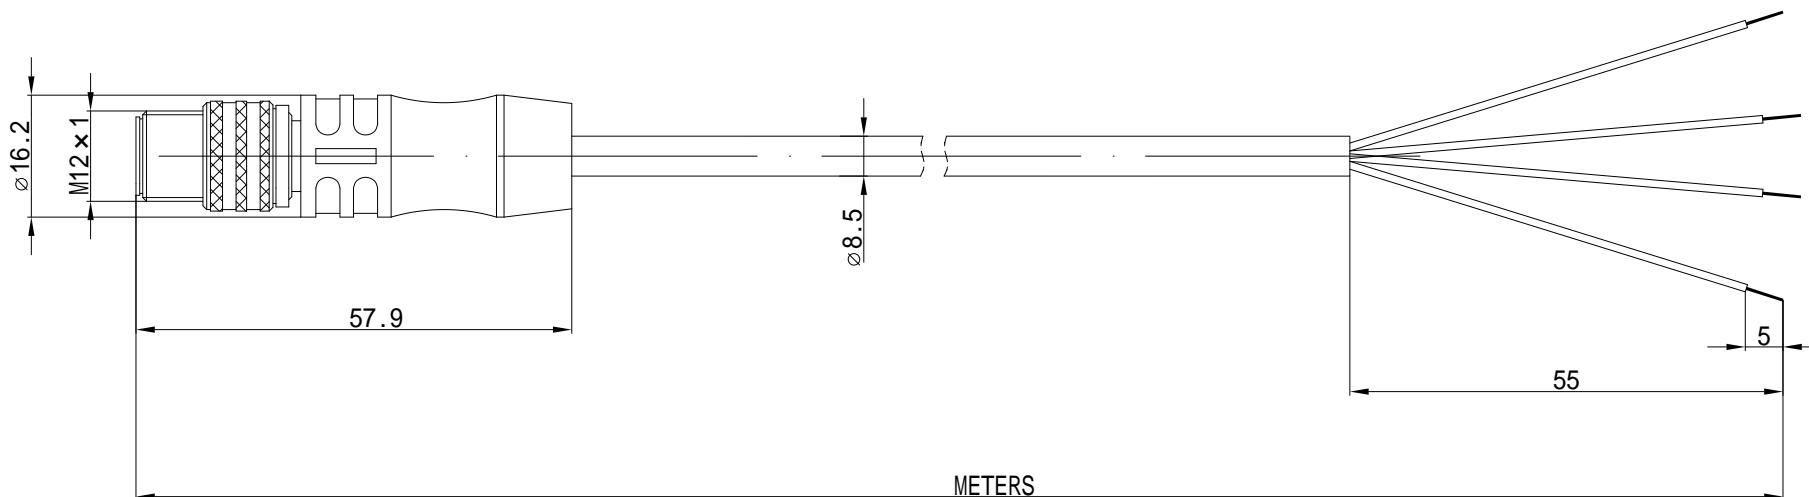

METERS

CABLE LENGTH	TOLERANCE
ALL LENGTHS	+4%(OR 50mm) OF LENGTH -0% (OR 0mm) OF LENGTH WHICHEVER IS GREATER
STRIP LENGTH	TOLERANCE
0 - 7mm	± 1.0mm
8 - 29mm	± 1.5mm
30 - 49mm	± 2.0mm
50 - 69mm	± 3.0mm
70 - 100mm	± 4.0mm
over 100mm	± 5.0mm

REV	COUNT	DESCRIPTION OF REVISIONS	BY	CHECKED	DATE

UNIT OF MEASUREMENT		<div></div> <div>Tianjin Geneuo Technology Co.,Ltd</div>		
MILLIMETER				
Approved: Date:	Date: 2018.4.16	Description: PS-EZ4- M/S10		
Process:YJ F Date:2018.5.24	Scale: 1:1			
Checked:WY Date:2018.5.3	3RD Angle Projection	<div></div>	<div>www.gsee-tech.cn www.gsee-tech.com</div>	REV A
Designed:LXH Date:2018.4.27				
SOURCE DRAWING-FOR REFERENCE ONLY				