


MALE END VIEW




1=BN
2=WH
3=BU
4=BK

SPECIFICATIONS

CONTACT CARRIER MATERIAL/COLOR	TPU/BLACK
MOLDED HEAD MATERIAL/COLOR	TPU/BLACK
CONTACT/PLATING	BRASS/GOLD
COUPLING NUT MATERIAL/PLATING	BRASS/NICKEL
OPERATING CURRENT	12 A
OPERATING VOLTAGE	63 VDC
CONDUCTOR INSULATION MATERIAL	PVC
NUMBER OF CONDUCTORS (AWG)	4 x 16 AWG
OPERATING TEMPERATURE	-20°C — +80°C
PROTECTION CLASS	IEC IP67

※METERS

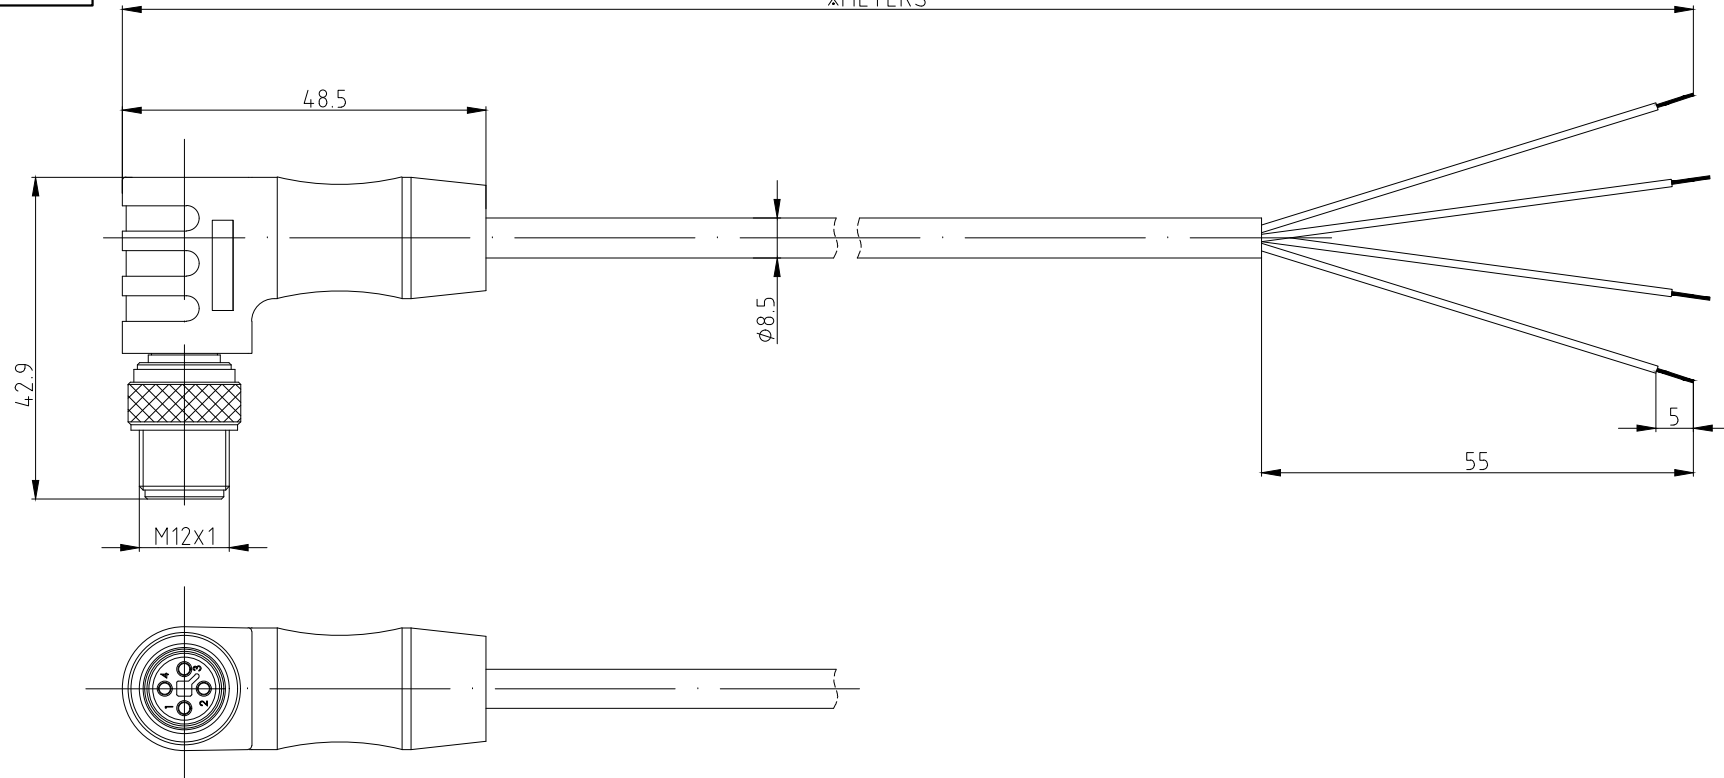

CABLE LENGTH TOLERANCE

ALL LENGTHS
+4%(OR 50mm) OF LENGTH
-0%(OR 0mm) OF LENGTH
WHICHEVER IS GREATER

STRIP LENGTH TOLERANCE

0 - 7mm	± 1.0mm
8 - 29mm	± 1.5mm
30 - 49mm	± 2.0mm
50 - 69mm	± 3.0mm
70 - 100mm	± 4.0mm
over 100mm	± 5.0mm

UNIT OF MEASUREMENT
MILLIMETER

Tianjin Geneuo Technology Co.,Ltd



Approved: Date:	Date: 2018.4.16		Description: PT-ELZ4-※M/P00	
Process:YJ F Date:2018.5.24	Scale: 1:1			
Checked:WY Date:2018.5.3	3RD Angle Projection		www.gsee-tech.cn www.gsee-tech.com	REV A
Designed:LXH Date:2018.4.27			SOURCE DRAWING-FOR REFERENCE ONLY	

REV	COUNT	DESCRIPTION OF REVISIONS	BY	CHECKED	DATE