


SPECIFICATIONS			
CONTANCT CARRIER MATERIAL/COLOR	TPU/BLACK		
CONTACTS	BRASS/GOLD		
RECEPTACLE MATERIAL/PLATING	BRASS/NICKEL		
OPERATING CURRENT	30 A		
OPERATING VOLTAGE	600 V		
CONDUCTOR INSULATION MATERIAL	PVC		
NUMBER OF CONDUCTORS (AWG)	3-12 AWG		
OPERATING TEMPERATURE	-40° C +90° C		
PROTECTION CLASS	IEC IP67		

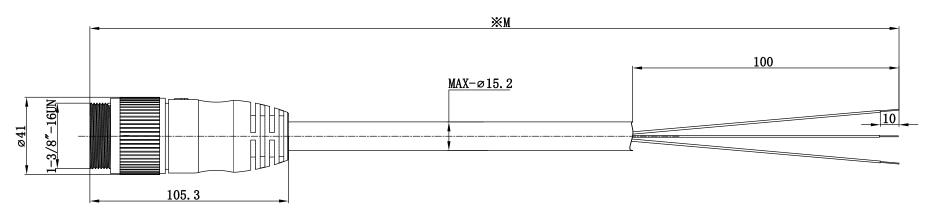

CABLE LENGTH	TOLERANCE
ALL LENGTHS	+4%(OR 50mm) OF LENGTH -0% (OR 0mm) OF LENGTH WHICHEVER IS GREATER
STRIP LENGTH	TOLERANCE
0 - 7mm	± 1.0mm
8 - 29mm	± 1.5mm
30 - 49mm	± 2.0mm
50 - 69mm	± 3.0mm
70 - 100mm	± 4.0mm
over 100mm	± 5.0mm

								UNIT OF MEASUREMENT MILLIMETER
								Approved: Date:
_								Process:YJF Date:2018.09.26
-								Checked: Date:
	REV	COUNT	DESCRIPTION OF	REVISIONS	ВУ	CHECKED	DATE	Designed:LHT Date:2018.5.31

UNIT OF MEASUREMENT	Tianjin Geneuo Technology Co.,Ltd				
Approved: Date:	Date: 2018. 5. 31 Scale: 1:1			Description:	
Process:YJF Date:2018.09.26				PZ3- ※ M/P00	
Checked: Date:	3RD Angle	9	$\overline{\Box}$	www.gsee-tech.cn www.gsee-tech.com	REV
Designed:LHT Date:2018.5.31	Projection	9	\subseteq	SOURCE DRAWING-FOR REFERENCE ONLY	- A

PZ3- M/P00	
www.gsee-tech.cn www.gsee-tech.com	REV