



针脚视图

P1 (Male)




P2、P3 (Female)




SPECIFICATIONS

CONTACT CARRIER MATERIAL/COLOR	TPU/BLACK
CONTACTS	BRASS/GOLD
RECEPTACLE MATERIAL/PLATING	BRASS/NICKEL
OPERATING CURRENT	30 A
OPERATING VOLTAGE	600 V
CONDUCTOR INSULATION MATERIAL	PVC
NUMBER OF CONDUCTORS (AWG)	4-12 AWG
OPERATING TEMPERATURE	-40° C — +90° C
PROTECTION CLASS	IEC IP67

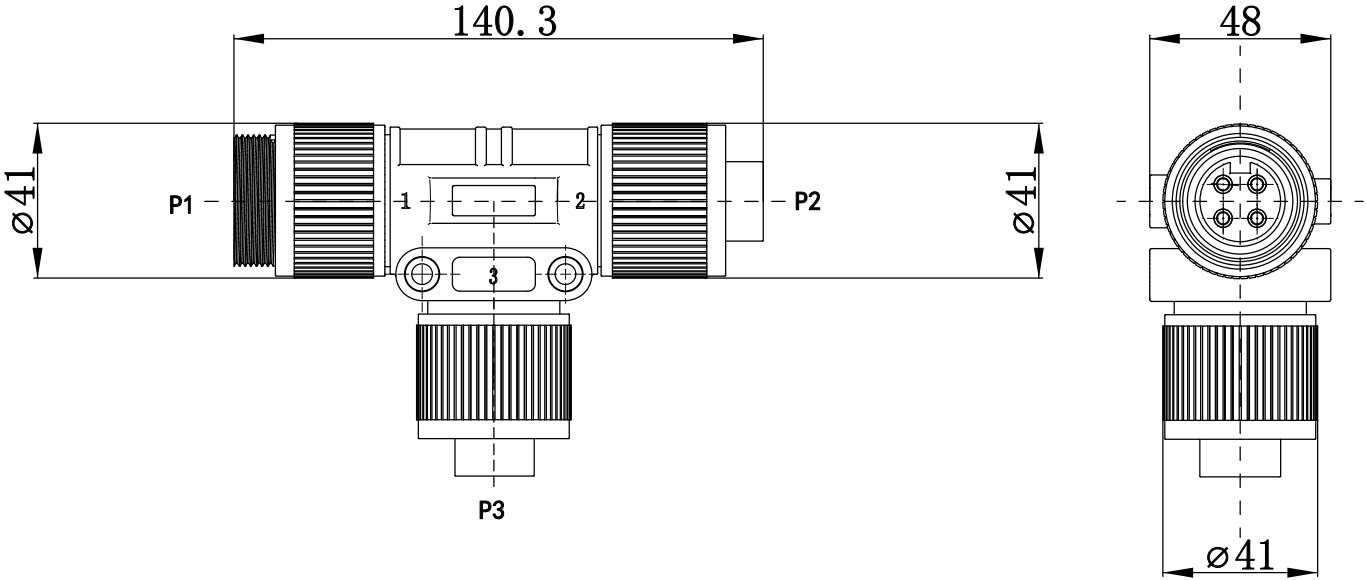

CABLE LENGTH	TOLERANCE
ALL LENGTHS	+4% (OR 50mm) OF LENGTH -0% (OR 0mm) OF LENGTH WHICHEVER IS GREATER
STRIP LENGTH	TOLERANCE
0 - 7mm	± 1.0mm
8 - 29mm	± 1.5mm
30 - 49mm	± 2.0mm
50 - 69mm	± 3.0mm
70 - 100mm	± 4.0mm
over 100mm	± 5.0mm

REV	COUNT	DESCRIPTION OF REVISIONS	BY	CHECKED	DATE

UNIT OF MEASUREMENT		GSEE TECH Tianjin Geneuo Technology Co.,Ltd		
MILLIMETER				
Approved: Date:	Date: 2018. 05. 31	Description: PZ4-2PK4		
Process:YJF Date:2018. 09. 26	Scale: 1:1			
Checked: Date:	3RD Angle Projection		www.gsee-tech. cn www.gsee-tech. com	REV A
Designed:LHT Date:2018. 5. 31			SOURCE DRAWING-FOR REFERENCE ONLY	