




FEMALE END VIEW



SPECIFICATIONS

CONTACT CARRIER MATERIAL/COLOR	TPU/BLACK
CONTACT MATERIAL/PLATING	BRASS/GOLD
MOLDED HEAD MATERIAL/COLOR	TPU/BLACK
O-RING MATERIAL	NBR
OPERATING CURRENT	3A
OPERATING VOLTAGE	60 V
CONDUCTOR INSULATION MATERIAL	PVC
OUTER KACKET MATERIAL	PVC
NUMBER OF CONDUCTORS (AWG)	3 x 24 AWG
OPERATING TEMPERATURE	-30°C — +70°C
PROTECTION CLASS	IEC IP67

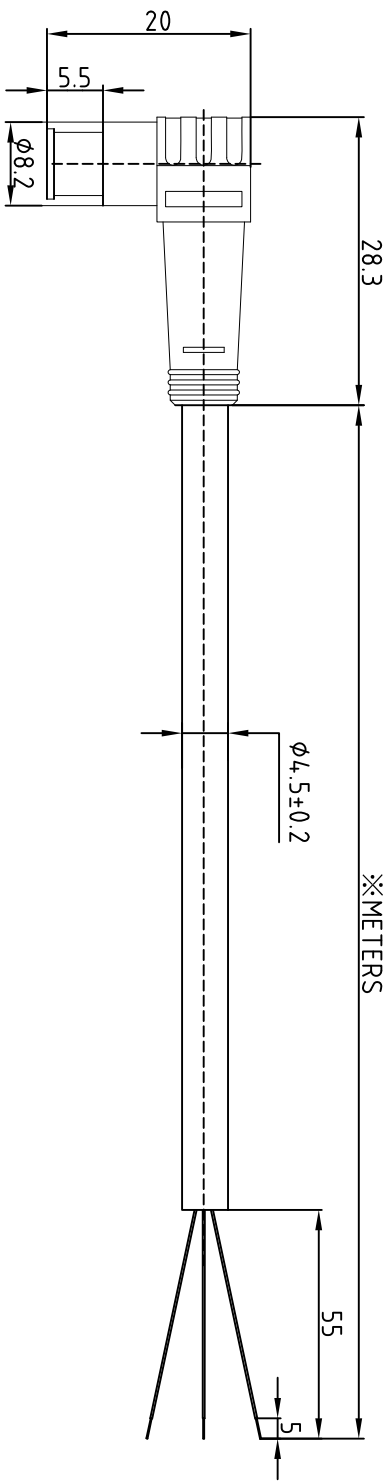

CABLE LENGTH	TOLERANCE
ALL LENGTHS	+4%(OR 50mm) OF LENGTH -0% (OR 0mm) OF LENGTH WHICHEVER IS GREATER
STRIP LENGTH	TOLERANCE
0 - 7mm	± 1.0mm
8 - 29mm	± 1.5mm
30 - 49mm	± 2.0mm
50 - 69mm	± 3.0mm
70 - 100mm	± 4.0mm
over 100mm	± 5.0mm

UNIT OF MEASUREMENT MILLIMETER				Tianjin Geneuo Technology Co.,Ltd					
Approved: Date:	Date:	2019.04.12		Description:				RLZ3-※M/P00	
Process: Date:	Scale:	1:1		3RD Angle Projection					
Checked: Date:				www.gsee-tech.cn www.gsee-tech.com				REV A	
Designed: Date:				SOURCE DRAWING-FOR REFERENCE ONLY					