



FEMALE END VIEW

1.WH
2.BN
3.GN
4.YE
5.GY
6.PK
7.BU
8.RD




SPECIFICATIONS	
CONTACT CARRIER MATERIAL/COLOR	TPU/BLACK
CONTACT MATERIAL/PLATING	BRASS/GOLD
HOUSING MATERIAL/PLATING	BRASS/NICKEL
O-RING MATERIAL	NBR
OPERATING CURRENT	1.5A
OPERATING VOLTAGE	30 V
CONDUCTOR INSULATION MATERIAL	PVC
OUTER JACKET MATERIAL	PVC
NUMBER OF CONDUCTORS (AWG)	8 x 26 AWG
OPERATING TEMPERATURE	-25°C — +80°C
PROTECTION CLASS	IEC IP67

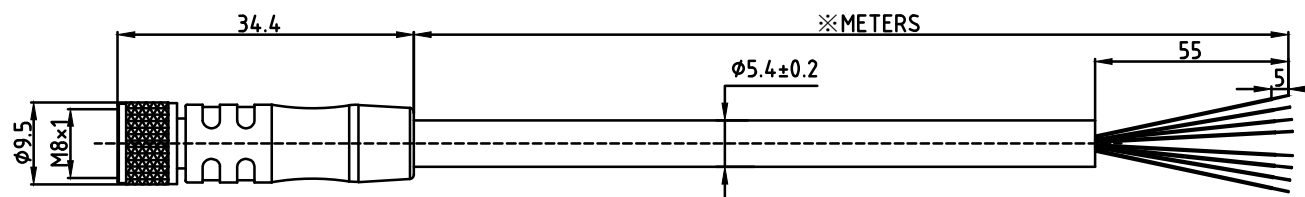

CABLE LENGTH	TOLERANCE
ALL LENGTHS	+4%(OR 50mm) OF LENGTH -0%(OR 0mm) OF LENGTH WHICHEVER IS GREATER
STRIP LENGTH	TOLERANCE
0 - 7mm	± 1.0mm
8 - 29mm	± 1.5mm
30 - 49mm	± 2.0mm
50 - 69mm	± 3.0mm
70 - 100mm	± 4.0mm
over 100mm	± 5.0mm

REV	COUNT	DESCRIPTION OF REVISIONS	BY	CHECKED	DATE

UNIT OF MEASUREMENT MILLIMETER		Tianjin Geneuo Technology Co.,Ltd			
Approved: Date:		Date: 2018.08.08		Description: SK8- M /P00	
Process:YJF Date:2018.08.22		Scale: 1:1			
Checked: Date:		3RD Angle Projection			
Designed:HT Date:2018.08.08				www.gsee-tech.cn www.gsee-tech.com SOURCE DRAWING-FOR REFERENCE ONLY	
				REV A	