


MALE END VIEW

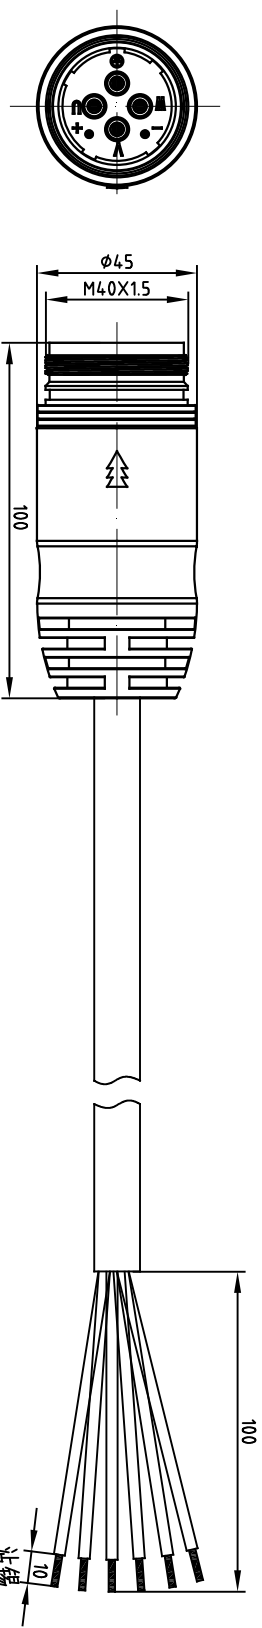

SPECIFICATIONS	
HOUSING MATERIAL/COLOR	NYLON/BLACK
MOLDED HEAD MATERIAL/COLOR	TPU/BLACK
CONTACT MATERIAL/PLATING	BRASS/GOLD
COUPLING NUT MATERIAL/PLATING	BRASS/NICKEL
RATED CURRENT (A)	55A/10A
RATED VOLTAGE (V)	630V/250V
OUTER CABLE JACKET MATERIAL/COLOR	PVC/ORANGE
CONDUCTOR INSULATION MATERIAL	PVC
NUMBER OF CONDUCTORS(AWG)	4x8AWG+2x16AWG
TEMPERATURE RANGE	-25℃ — +80℃
PROTECTION CLASS	IEC IP67

CABLE LENGTH	TOLERANCE
ALL LENGTHS	+4%(OR 50mm) OF LENGTH -0% (OR 0mm) OF LENGTH WHICHEVER IS GREATER
STRIP LENGTH	TOLERANCE
0 - 7mm	± 1.0mm
8 - 29mm	± 1.5mm
30 - 49mm	± 2.0mm
50 - 69mm	± 3.0mm
70 - 100mm	± 4.0mm
over 100mm	± 5.0mm

REV	COUNT	DESCRIPTION OF REVISIONS	BY	CHECKED	DATE

UNIT OF MEASUREMENT MILLIMETER		Tianjin Geneuo Technology Co.,Ltd			GSEETech	
Approved: Date:	Date: 2018.4.27	Description: TWZ64-XM/P00			www.gsee-tech.cn www.gsee-tech.com	
Process:YJF Date:2019.3.6	Scale: 1:1					
Checked: WY Date:	3RD Angle Projection					
Designed:WL Date:2019.02.02		SOURCE DRAWING-FOR REFERENCE ONLY			REV A	